


# PROTECTION PROTOCOL FOR MARINE FAUNA DURING SEISMIC CAMPAIGNS

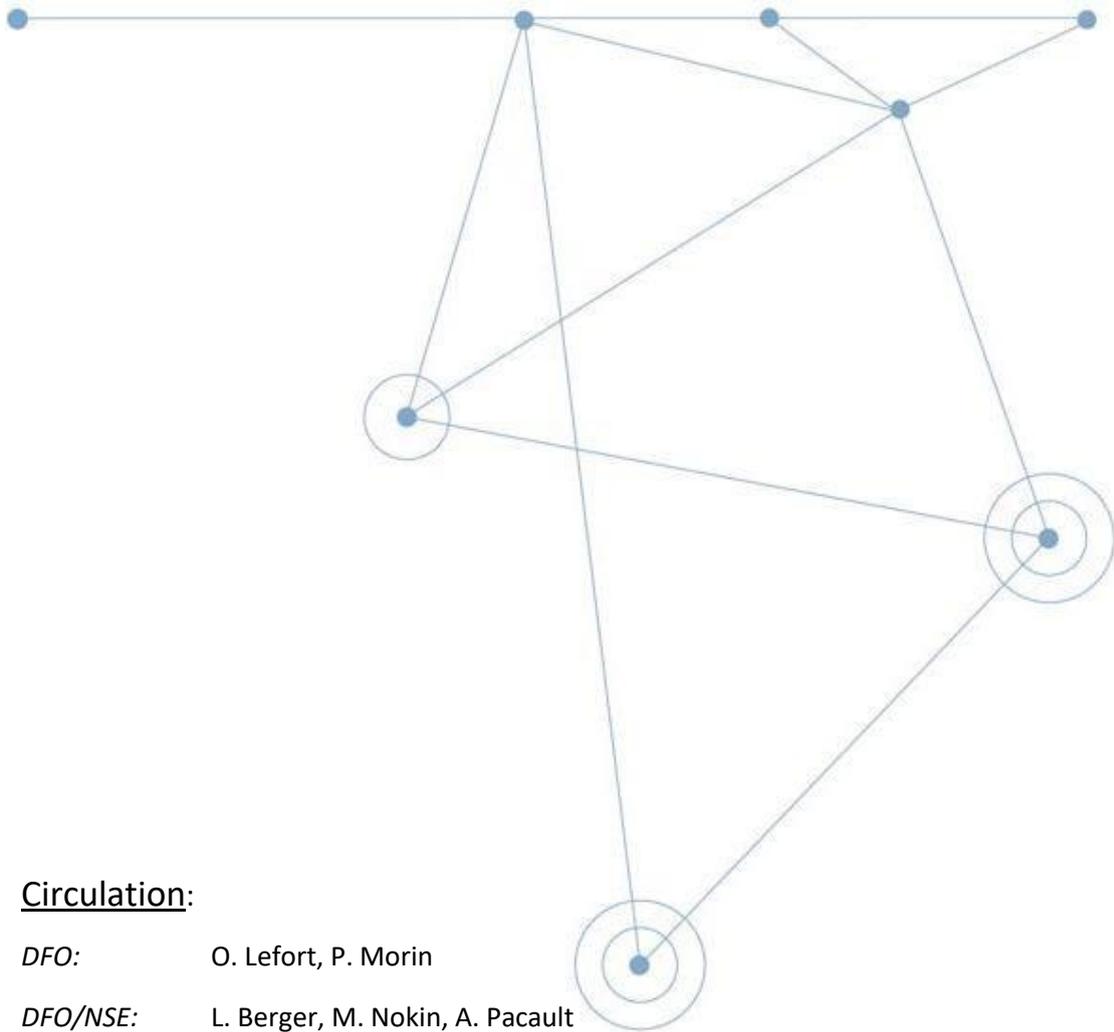

## Circulation:

- DFO:* O. Lefort, P. Morin
- DFO/NSE:* L. Berger, M. Nokin, A. Pacault
- DFO/PON:* G. Peltier, A. Feld, M. Delmas, M. Denniel
- GENAVIR:* R. Balcon, F. Benon, J.Y. All

## Document description

<b>Report title:</b> PROTECTION PROTOCOL FOR MARINE FAUNA AND SEISMIC CAMPAIGNS						
<b>Internal reference:</b> ASTI-2019-169  <b>Circulation:</b> <input checked="" type="checkbox"/> Free (internet)  <input type="checkbox"/> restricted  <input type="checkbox"/> Forbidden (confidential) – date that confidentiality raised: YYYY/MM/DD			<b>Publication date:</b>  <b>Version:</b> 1.0.0  <b>Cover illustration reference</b>   <b>Language(s):</b>			
<b>Abstract:</b> This document explains measures taken by Ifremer to protect marine fauna when using class 1 seismic sources (> 500 in <sup>3</sup> ). Before presenting the protocol to be applied during marine geoscience campaigns, the acoustic risk assessment principles are recapped.						
<b>Key words:</b> Seismic, marine mammals, turtles, thresholds, PTS, TTS, exclusion zone, MMOs, PAM, pre-shot research, ramp-up, stopping shots						
<b>How to quote this document:</b>						
<b>Availability of the research data:</b>						
<b>DOI:</b>						
<b>Revisions:</b>						
<i>Index</i>	<i>Subject</i>	<i>Date</i>	<i>Written by</i>	<i>Checked by</i>	<i>Approved by</i>	
1	Creation	19/07/2011	X. Lurton			
2	Revision	09/07/2013	X. Lurton	Y. Le Gall	M. Nokin	
3	Revision	04/01/2016	C. Ducatel Y. Le Gall X. Lurton	M. Nokin	P. Cotty  O. Lefort	
4	Revision	08/03/2019	C. Ducatel Y. Le Gall X. Lurton	M. Nokin	O. Lefort 	



## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL PRESENTATION</b> .....	<b>10</b>
1.1	Context and Goals.....	10
1.2	Assessment of acoustic risks from seismic sources: recap.....	11
1.2.1	Principle.....	11
1.2.2	Auditory thresholds and weighting functions: best practice.....	14
1.2.3	Results.....	16
1.3	Description and summary of Ifremer’s mitigation measures.....	18
1.3.1	Before the campaign.....	18
1.3.2	During the campaign.....	18
<b>2</b>	<b>PROTECTION PROTOCOL FOR MARINE FAUNA AGAINST SEISMIC EMISSIONS FROM CLASS 1 SOURCES</b> .....	<b>18</b>
2.1	Upstream study and acoustic risks.....	19
2.1.1	Protected zones.....	19
2.1.2	Species of Concern.....	19
2.1.3	Acoustic risk study.....	20
2.2	Measures applied during the campaign.....	20
2.2.1	Exclusion zone and alarm zone.....	20
2.2.2	Visual monitoring.....	21
2.2.3	Acoustic monitoring.....	21
2.2.4	Pre-watch.....	22
2.2.5	Ramp-up.....	22
2.2.6	Stopping shots.....	23
2.2.7	Change of profile.....	23
2.2.8	Specific case of turtles.....	23
2.2.9	Qualifications of the MMOs and PAM Operators.....	24
2.2.10	Data collection.....	25
2.2.11	Reporting.....	26
<b>3</b>	<b>CONCLUSIONS</b> .....	<b>26</b>
<b>4</b>	<b>BIBLIOGRAPHY</b> .....	<b>27</b>
<b>5</b>	<b>ANNEXES</b> .....	<b>30</b>
5.1	Annexe 1: References to the main guides and conventions.....	30
5.2	Annexe 2: Seismic sources concerned by applying the protocol.....	32
5.3	Annexe 3: Acoustic characteristics of the sources.....	35

5.4	Annexe 4: Forms for MMOS and PAM operators .....	43
5.5	Annexe 5: EXTRACT FROM THE END OF CAMPAIGN SUMMARY FORM.....	46
5.6	Annexe 6: FINAL REPORT OF THE MMO AND PAM OPERATOR ACTIVITY (STANDARD PLAN) .....	47

## LIST OF DIAGRAMS

Figure 1: Geometry of the field radiated by a seismic source at a given point .....	12
Figure 2: Geometry of the field radiated by a mobile source along an acquisition profile [4].....	13
Figure 3: M-WF weighting functions issued by Southall 2007 [9] (below) and NMFS 2018 [5] (dotted lines).....	15
Figure 4: Case of LF cetaceans: SEL <sub>cum</sub> along a seismic acquisition profile for the source S <sub>1</sub> of 2570 in <sup>3</sup> .....	17
Figure 5: <i>Acoustic signature (Sisource simulation) of the source made up of 4 GGUN air guns (3x250 in<sup>3</sup> + 1x 45 in<sup>3</sup>)</i> .....	33
Figure 6: Time signal from seismic source S <sub>1</sub> (V=2570 in <sup>3</sup> ) .....	36
Figure 7: Frequency spectrum of the seismic signal from source S <sub>1</sub> (V=2570 in <sup>3</sup> ).....	37
Figure 8: Directivity in the vertical/longitudinal plane, 0° tilt, seismic source S <sub>1</sub> , Gundalf® .....	38
Figure 9: Directivity in the transverse plane, 90° tilt, seismic source S <sub>1</sub> , Gundalf® .....	38
Figure 10: Directivity diagrams in the vertical plane according to the longitudinal axis of the source (S <sub>1</sub> ). .....	39
Figure 11: Directivity diagrams in the vertical/longitudinal plane of the source S <sub>1</sub> .....	39
Figure 12: Time signal from seismic source S <sub>2</sub> (V=4990 in <sup>3</sup> ) .....	40
Figure 13: Frequency spectrum of the seismic signal from source S <sub>2</sub> (V=4990 in <sup>3</sup> ) .....	40
Figure 14: Directivity in the vertical/longitudinal plane, 0° tilt, seismic source S <sub>2</sub> , Gundalf® .....	41
Figure 15: Directivity in vertical/ transverse plane, 90° tilt, seismic source S <sub>2</sub> , Gundalf® .....	41
Figure 16: Directivity diagrams in the vertical plane according to the longitudinal axis of the source (S <sub>2</sub> ). .....	42
Figure 17: Directivity diagrams in the vertical plane according to the longitudinal axis of the source (S <sub>2</sub> ). .....	42

## LIST OF TABLES

Table 1: Classification of cetaceans according to their functional auditory ranges [5] and [6] .....	15
Table 2: PTS threshold values for pulsed signals [5,6].....	16
Table 3: Summary of thresholds and exclusion radii (m) for Sources S <sub>1</sub> and S <sub>2</sub> for all three groups of cetaceans .....	17
Table 4: Duration of pre-shot research depending on the mitigation equipment configuration and the water height.....	22
Table 5: Characteristics of Ifremer Class 1 seismic arrays .....	35

## GLOSSARY:

**ACCOBAMS:** Agreement on cetacean conservation in the Black Sea, the Mediterranean and the adjacent Atlantic zone

**ASCOBANS:** Agreement on the conservation of small cetaceans in the Baltic Sea and the North-East Atlantic

**LF:** Low Frequency

**Good observation conditions:** During the daytime, with sea conditions at no more than a 3 on the Beaufort scale, and an entirely visible exclusion zone.

**Limited observation conditions:** visual observation is still possible up to a 5 on the Beaufort scale if the exclusion zone is clear. Other criteria (sea conditions, cloud cover, etc.) influence observation conditions. Consequently, it comes down to the person in charge of the MMO equipment to judge the weather conditions that allow visual observation.

**Class 1:** seismic source for which total volume is greater than 500 in<sup>3</sup>

**Class 2:** seismic source for which total volume is less than 500 in<sup>3</sup>

**CBD:** Convention on biological diversity

**CMS:** Convention on the conservation of migratory species of wild animals.

**CPA:** Closest Point of Approach

**MSFD:** Marine Environment Strategy Framework Directive

**DFO:** Oceanographic Fleet Management

**DFO/PON:** DFO Naval Operations Centre

**HF:** High Frequency

**MF:** Medium Frequency

**MM:** Marine Mammals

**MMO:** Marine Mammal Observer

**NMFS:** National Marine Fisheries Service

**NOAA:** National Oceanic and Atmospheric Administration (USA)

**NW:** Non-Weighted

**IMO:** International Maritime Organisation

**OSPAR:** Convention for the Protection of the Marine environment of the North-East Atlantic.

**PAM (*Passive Acoustic Monitoring*):** detection, identification and location system using passive acoustics. This generally refers to a towed streamer with a network of hydrophones, completed by its signal processing system including the specific software.

**TL:** Transmission Losses

**PSD:** Power Spectral Density

**PTS:** Permanent Threshold Shift

**RMS:** Root Mean Square

**SEL:** Sound Exposure Level

**SEL<sub>CUM</sub>:** Accumulated sound exposure level

**SIG:** Geographic Information System

**SL:** Sound Level

**SL<sub>PK</sub>:** Peak Sound Level

**SPL:** Sound Pressure Level

**SPL<sub>PK</sub>:** Peak Sound Pressure Level

**Species of Concern (SoC):** groups together marine species to which this protocol is applied. This refers to all Baleen whales from the large toothed whales (sperm whale, orca, false killer whale, pilot whale, beaked whale, Risso's dolphin), and porpoises. The protocol does not encompass small oceanic dolphins such as *stenella and delphinus*, with the exception of species protected by the host country's regulations in force. Sea turtles are also considered as species of concern and are subject to specific mitigation measures.

**Soft-start (or ramp-up):** progressive start-up procedure for seismic emissions intended to increase the sound level up to its nominal value reached after a certain time.

**TTS:** Temporary Threshold Shift

**EU:** European Union

**VHF:** Very High Frequency

**WF:** Weighted Function

**Warning zone:** circle around the acoustic source with a radius set at 1.5 km for visual observations with no boundaries for acoustic detections. Reinforced surveillance is applied if a relevant species is spotted inside this zone.

**Exclusion zone (Zex):** circle around the acoustic source with a radius set at 500 m for class 1 seismic sources. Seismic shots are stopped if a species of concern is spotted inside this zone.

# 1 GENERAL PRESENTATION

## 1.1 Context and Goals

The impact of underwater acoustic noise on animals (particularly marine mammals) has been the subject of many national and international papers aiming, on the one hand, to fill in the remaining scientific gaps and, on the other hand, to develop technology and methods to limit consequences. According to Article 1 of the United Nations Convention on the Law of the Sea (UNCLOS, 1982), anthropogenic noise sources can be considered as a cause of pollution [1]. Many inter-governmental decisions have thereby guided several recommendations and regulations. Annexe 1 provides a non-exhaustive list of the main texts concerning underwater anthropogenic noise and marine animals. For this purpose, several states (Australia, Brazil, New Zealand, etc.) have already regulated the use of acoustic equipment at sea.

Out of concern for environmental issues and aware of the sensitive nature of certain sound emissions, since 2011 Ifremer has defined a protection protocol to limit acoustic impact risks on marine mammals. Following modelling work and measures run for several years, acoustic risks consideration for marine mammals is nowadays limited to the single case of seismic sources. Each scientific campaign using class 1 seismic sources (total volume > 500 in<sup>3</sup>) programmed on an oceanographic fleet ship nowadays must systematically run an acoustic risk analysis and take suitable cautionary measures to be applied at sea [2]. Impacts from other acoustic systems (particularly sounding machines) are considered as negligible and are not subject to precautions for specific use [2,3,4].

Recent scientific progress in the field [4, 5, 6] has led Ifremer to update its assessment method for acoustic risks from seismic sources by considering new NOAA physiological thresholds, new weighting functions [5, 6] and by calculating the accumulated sound exposure along a Survey profile [4].

Considering this progress and feedback from MMOs and PAM operators on board Ifremer campaigns, the ASTI-2016-5 version of the marine mammal protection protocol against seismic emissions [2] is revised in this document. Before explaining the protection protocol, there is a recap of the acoustic risk assessment principles.

## 1.2 Assessment of acoustic risks from seismic sources: recap

### 1.2.1 Principle

To assess the potential impact of a sound source on the marine fauna, the signal emitted by this source must be expressed as the maximum sound level received in an instant (*Peak Sound Pressure Level:  $SPL_{PK}$* ) and as the cumulated sound exposure level (*Cumulated Sound Exposure Level:  $SEL_{cum}$* ). These metrics take into consideration the sound level emitted by the source, the frequency and the angular directivity, meaning the spatial distribution of the sound energy, plus the duration and the rate of signal emission. The received level also depends on sound wave propagation phenomena.

The method used in the document [7] to assess the physiological impact is developed working from the sonar equation [8], that translates an energy balance between the signal levels emitted, received and processed. The definitions and main equations used in this work are presented below:

$SL$  is the sound level on emission, defined as the maximum value of the acoustic pressure at the reference distance  $R_0 = 1$  m from the source, expressed in dB ref  $1\mu\text{Pa} @ 1$  m. In this specific study of seismic sources,  $SL_{PK}$  is the peak value, with an increase of 3 dB (in the case of a harmonic signal) compared to the mean square value  $SL_{RMS}$ .

$$SL_{PK}(R_0) = 20 \log_{10}(p_{max}/p_{ref})$$

With  $p_{max} = \max(p(t))$ ,  $p(t)$  is the pressure level at distance  $R_0$  and  $p_{ref} = 1 \mu\text{Pa}$ .

$SPL(R)$  represents the acoustic pressure level received at a distance  $R$ , in dB ref  $1 \mu\text{Pa}$ .

$SEL(R)$  expresses the sound exposure level at a distance  $R$ . It is calculated working from  $SEL(R_0)$  that is given by integrating the acoustic pressure at  $R_0 = 1$  m and then squared depending on the time over the entire useful duration of the received signal and it is expressed in dB ref.  $1\mu\text{Pa}^2 \times \text{s} @ 1$  m.

$$SEL(R_0) = 20 \log_{10} \left( \int p^2(t) dt / p_{ref}^2 \right)$$

$DF(\theta)$  is the value of the Directivity Function from the source at the angle  $\theta$ , describing the spatial distribution of the intensity transmitted. By convention,  $DF(0^\circ) = 0$  dB in the source axis, namely the maximum intensity direction (in general aimed vertically downwards for seismic sources and sounding machines).

$PT(R)$  expresses the transmission losses (in dB) at distance  $R$  caused by propagation of the sound signal in the surrounding medium. They consider both the geometric losses and the absorption phenomenon [8]. The propagation model used in this study rules out the absorption phenomenon due to the low frequencies used in seismic studies. The equation characterising the transmission losses ( $PT$ ) thereby relies on the spherical divergence law:

$$PT(R) = 20 \log R$$

Considering these parameters and in compliance with the sonar equation  $SPL(R, \theta)$  and  $SEL(R, \theta)$  are expressed as:

$$SPL(R, \theta) = SL(R_0) + DF(\theta) - PT(R)$$

$$SEL(R, \theta) = SEL(R_0) + DF(\theta) - PT(R)$$

In the case of exposure to several signals,  $SEL(R, \theta)$  must consider their number and their respective levels.

The sound risk is assessed for a marine mammal exposed to a seismic source implemented along a profile (straight line route that might stretch several tens or even hundreds of km). Exclusion zones are calculated by considering the influence of the directivity of the source and the frequency weighting functions for groups of cetaceans classified by their hearing (LF, HF, VHF) A certain number of hypotheses are performed in the modelling:

- The sound source moves at a constant speed (5 knots) and in the same direction (Ifremer class 1 seismic profile, see Annexe 3 for characteristics of the Ifremer seismic source characteristics),
- The receiver is stationary,
- The seismic shot rate is constant,
- Propagation losses are calculated according to the spherical divergence model [8],
- the  $SEL_{cum}$  is calculated by integrating the emission when a ship passes at the Closest Point of Approach (CPA) to the marine mammal to consider the exposure that makes the greatest contribution.
- To obtain a relatively simple calculation, the directivity functions in the vertical/longitudinal plane against the source were retained in the modelling, by considering them invariant due to rotation around the vertical axis at the source (hypothesis of a omnidirectional source in azimuth, a priori correct for a single air gun but doubtlessly less so for an array of several air guns).

### Calculation of the $SPL(R)$ :

Vertical to the source, the levels perceived in the water depending on the level emitted and the propagation losses in the surrounding area. Considering these elements, the maximum level received ( $SPL(R)$ ) at a distance  $R$  from the source is given by:

$$SPL_{PK}(R) = SL_{PK}(R_0) - PT(R)$$

In other terms, the  $SPL_{PK}(R)$  does not consider:

- duration of the emitted signal,
- frequency content,
- directivity function,
- shot rate,
- weighting functions.

With:

$$\theta = \tan^{-1}\left(\frac{y}{z}\right)$$

$$R = \sqrt{y^2 + z^2}$$

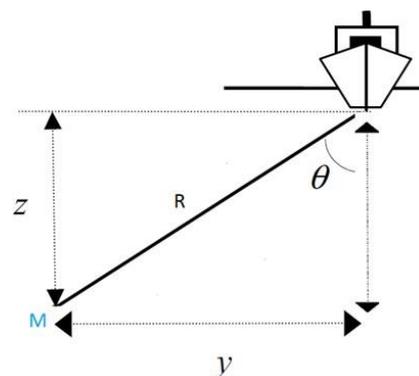


Figure 1: Geometry of the field radiated by a seismic source at a given point

### SEL calculation along an acquisition profile

The geometry of the field radiated by a seismic mobile source along an acquisition profile is represented in Figure 2. The source is located in the plane ( $z = 0$ ) and it moves at constant speed (here  $V = 5$  knots) along the  $X$  axis. A marine mammal is present at point  $M$  with coordinates ( $X_M = 0, Y_M, Z_M$ ) where the cumulated sound exposure level is calculated.

$$R = \sqrt{X^2 + Y_M^2 + Z_M^2} \text{ et } \theta = \cos^{-1}(Z_M / R)$$

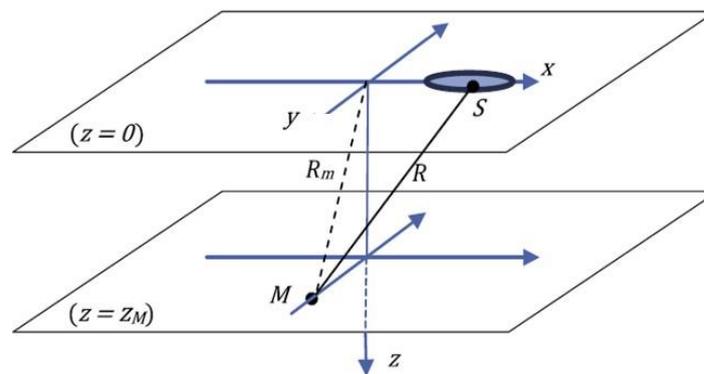


Figure 2: Geometry of the field radiated by a mobile source along an acquisition profile [4]

The cumulated SEL is estimated by integrating the emission corresponding to a ship passing at the CPA. It is calculated by considering the shot rate and the speed of the vessel. Transmission losses, directivity and weighting functions are also considered. The cumulated SEL is determined by:

$$SEL (Y_M, Z_M)_{cum} = 10 \log_{10} \sum_i \int_{f_{min}}^{f_{max}} 10^{\left[ \frac{PSD(f) + DF(f, \theta_i) + WF(f) - PT(R(X_i))}{10} \right]} df$$

With:

*PSD*: the power spectrum density level of the seismic source given in dB re 1  $\mu$ Pa /Hz @ 1 m,

*DF*: the source directivity function value,

*WF*: the weighting function.

The point sampling in  $x$  (axis that the vessel is moving along) is defined so that there is one transmission per coordinate  $x_i$ ; the step in  $x$  is  $\Delta x = V \times T$ , where  $V$  is the speed of the vessel (in m/s) and  $T$  the duration between two shots (in s).

### 1.2.2 Auditory thresholds and weighting functions: best practice

In the 1990s, to assess acoustic risks, the American federal agency (NMFS) firstly defined two levels of harassment corresponding to the perceived levels [3]:

- Level A is equivalent to the danger limit, over which physiological effects are likely to occur.
- Level B corresponding to the threshold over which considerable behavioural changes can occur.

For pulsed sources, A and B levels were respectively 180 and 160 dB re 1  $\mu$ Pa (RMS). This definition only considered the perceived level. The frequency, duration, occurrence of the signals and the auditory sensitivity of the different species of marine mammals was not considered. Consequently, these initial thresholds were way too simplistic and have now been discarded.

In 2007, Southall and a team of specialists published a summary [9] of progress in knowledge relating to the auditory capacities of marine mammals, developing several key points:

- Marine mammals are classified into 5 categories depending on their auditory capacities, considering direct and indirect measures made for certain species,<sup>1</sup>
- Weighting functions *M-WF* are defined for each of these groups,
- New thresholds [9] are proposed by considering the nature of the signal, the level received and the duration of the exposure.

Initially proposed in the report [9], weighting functions *M-WF* were developed to consider the auditory sensitivity of marine mammals and assess the potential effects of a sound signal on a given category.

In recent reports [5, 6], the NMFS then Southall and his team particularly summarise new knowledge obtained since 2007 [10 to 14]. This progress leads to adjusting the functional hearing ranges for the 6 categories of marine mammals and new weighting functions and thresholds for TTS and PTS. Table 1 presents the 3 categories of cetaceans. Figure 3 illustrates the weighting functions for type M [9], represented by solid lines and those currently used in the NMFS guide [5] and in the review drafted by Southall and his co-authors [6], represented by dotted lines.

---

<sup>1</sup> NB: no audiometric measurement is available for Baleen whales.

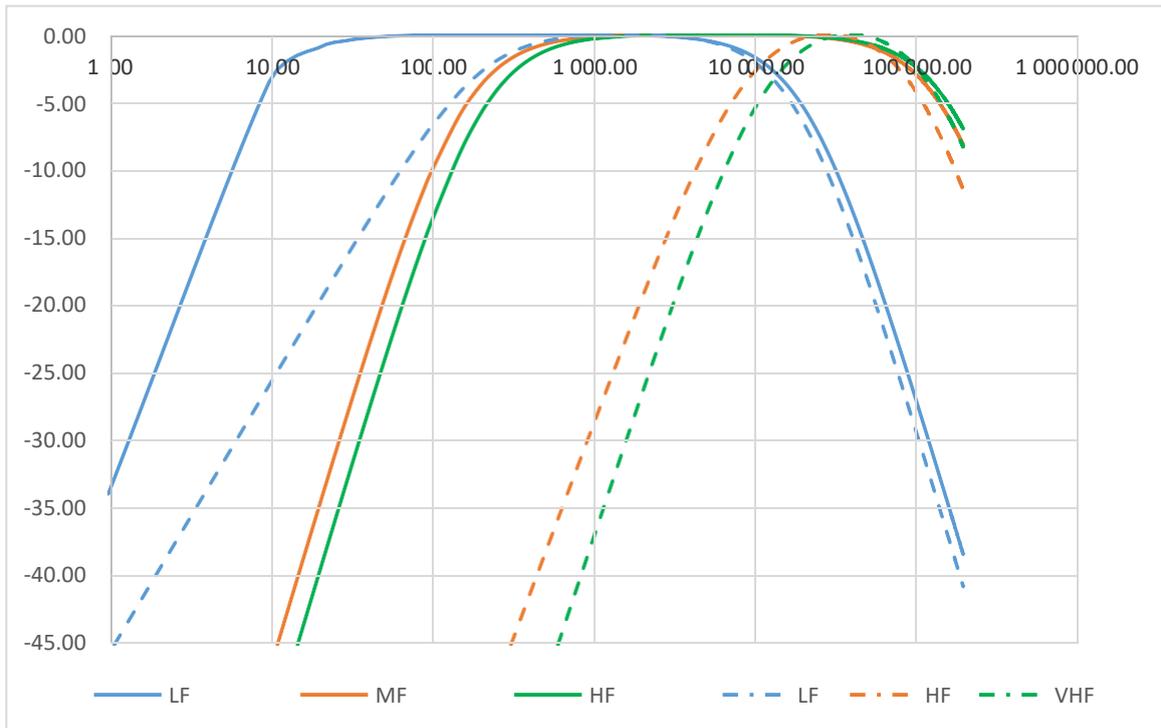


Figure 3: M-WF weighting functions issued by Southall 2007 [9] (solid lines) and NMFS 2018 [5] (dotted lines)

Marine mammal group		Audible frequency range
LF	<b>Balaenidae</b> ( <i>Balaena</i> , <i>Eubalaenidae</i> spp.); <b>Balaenopteridae</b> ( <i>Balaenoptera physalus</i> , <i>B. musculus</i> ); <b>Balaenopteridae</b> ( <i>Balaenoptera acutorostrata</i> , <i>B. bonaerensis</i> , <i>B. borealis</i> , <i>B. edeni</i> , <i>B. omurai</i> ; <i>Megaptera novaeangliae</i> ); <b>Neobalenidae</b> ( <i>Caperea</i> ), <b>Eschrichtiidae</b> ( <i>Eschrichtius</i> )	7 Hz to 35 kHz
HF	<b>Physeteroidea</b> ( <i>Physeter</i> ); <b>Ziphiidae</b> ( <i>Berardius</i> spp., <i>Hyperoodon</i> spp., <i>Indopacetus</i> , <i>Mesoplodon</i> spp., <i>Tasmacetus</i> , <i>Ziphius</i> ); <b>Delphinidae</b> ( <i>Orcinus</i> ); <b>Delphinidae</b> ( <i>Delphinus</i> , <i>Feresa</i> , <i>Globicephala</i> spp., <i>Grampus</i> , <i>Lagenodelphis</i> , <i>Lagenorhynchus acutus</i> , <i>L. albirostris</i> , <i>L. obliquidens</i> , <i>L. obscurus</i> , <i>Lissodelphis</i> spp., <i>Orcaella</i> spp., <i>Peponocephala</i> , <i>Pseudorca</i> , <i>Sotalia</i> spp., <i>Sousa</i> spp., <i>Stenella</i> spp., <i>Steno</i> , <i>Tursiops</i> spp.); <b>Monodontidae</b> ( <i>Delphinapterus</i> , <i>Monodon</i> ); <b>Plantanistidae</b> ( <i>Plantanista</i> )	150 Hz to 160 kHz
VHF	<b>Delphinidae</b> ( <i>Cephalorhynchus</i> spp.; <i>Lagenorhynchus cruciger</i> , <i>L. australis</i> ); <b>Phocoenidae</b> ( <i>Neophocaena</i> spp., <i>Phocoena</i> spp., <i>Phocoenoides</i> ); <b>Iniidae</b> ( <i>Inia</i> ); <b>Kogiidae</b> ( <i>Kogia</i> ); <b>Lipotidae</b> ( <i>Lipotes</i> ); <b>Pontoporiidae</b> ( <i>Pontoporia</i> )	275 Hz to 160 kHz

Table 1: Classification of cetaceans according to their functional auditory ranges [5] and [6]

Sufficiently intense sound exposure for an animal can lead to an increase in the hearing threshold. The duration of this increase depends essentially on the exposure time, the breadth and the frequency of the signal. This shift in the hearing threshold can be temporary (*TTS*) or permanent (*PTS*).

For pulsed signals, the sound exposure duration is not the only criteria that can cause physiological damage. It is along these lines that the NMFS proposes a dual approach for pulsed signals by expressing the *TTS* and *PTS* thresholds at the same time in  $SEL_{cum}$  (cumulated sound exposure level) and in  $SPL_{PK}$ . Furthermore, the peak value for acoustic pressure does not consider the frequencies at which the targeted animal is the most sensitive, the weighting functions are therefore not considered for the metrics  $SPL_{PK}$ . The *PTS* thresholds used by the NOAA and Southall's team are given in Table 2 [5,6].

Group	$SEL_{cum}$ (weighted) In dB re $1\mu Pa^2s$	$SPL_{PK}$ (not weighted) En dB re $1\mu Pa$
LF	183	219
HF	185	230
VHF	155	202

Table 2: *PTS* threshold values for pulsed signals [5,6].

### 1.2.3 Results

Following Ifremer's acoustic risk assessment results for seismic sources, two classes of seismic sources were defined:

- Class 1 for source volumes over  $500 \text{ in}^3$  (8.2 litres), that can potentially affect marine mammals.
- Class 2 for source volumes under  $500 \text{ in}^3$  (8.2 litres).

This classification is justified in Annexe 2.

This mitigation procedure is only applied to Class 1. Class 2 is not subject to specific control or mitigation measures.

Table 3 summarises the results from the acoustic risk assessment for Ifremer's most powerful seismic sources, noted  $S_1$  ( $V = 2570 \text{ in}^3$ ) and  $S_2$  ( $V = 4990 \text{ in}^3$ ). The detailed characteristics of these sources are provided in Annexe 3. For cetaceans from the LF (impact criterion:  $SEL_{cum}$ ) and HF groups, the most commonly found species during the Ifremer marine geoscience campaigns, the maximum exclusion radii thereby calculated are around 100 m (Table 3). By taking an exclusion radius of 500 m (chosen in the Ifremer protocol and in most internationally applied protocols), the security factor is therefore close to 5. When considering cetaceans in the VHF group, with a very low probability of finding them in high-sea campaigns, the impact criterion is the  $SPL_{PK}$ . The calculation thereby gives a maximum exclusion rate of 420 m, still less than the safety distance of 500 m defined in the Ifremer protocol. This radius is calculated for marine mammals in the source axis. For species swimming on the surface or at shallow depths, the attenuation caused by the array's directivity is around 30 dB, which brings the exclusion radius to 13 m for the VHF category.

In conclusion, defining an exclusion radius of 500 m for seismic sources with a volume over 500 in<sup>3</sup> is therefore a conservative measure.

		Cetacean group		
		LF	HF	VHF
	Thresholds_SPL <sub>PK</sub> (dB re 1 µPa)	219	230	202
S <sub>1</sub>	Zex_SPL <sub>PK</sub> (m)	41	11	288
S <sub>2</sub>	Zex_SPL <sub>PK</sub> (m)	60	17	422
	Thresholds_SEL <sub>cum</sub> (dB re 1 µPa <sup>2</sup> .s)	183	185	155
S <sub>1</sub>	Zex_SEL <sub>cum</sub> (m)	114	0	2
S <sub>2</sub>	Zex_SEL <sub>cum</sub> (m)	103	0	3

Table 3: Summary of thresholds and exclusion radii (m) for the Sources S<sub>1</sub> and S<sub>2</sub> for all three groups of cetaceans

Figure 4 represents the SEL<sub>cum</sub> modelling results for LF cetaceans along a seismic acquisition profile for the most detrimental seismic source: S<sub>1</sub>.

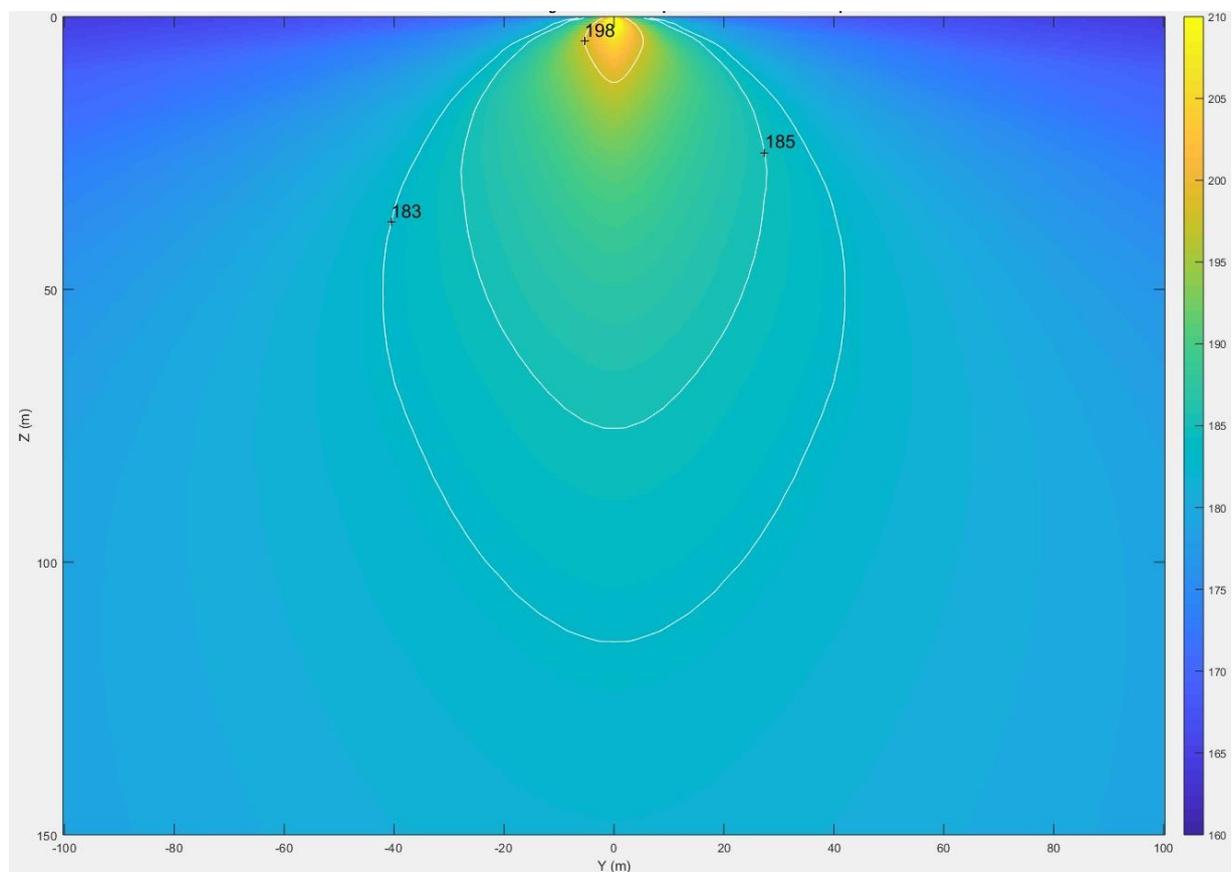


Figure 4: Case of LF cetaceans: SEL<sub>cum</sub> along a seismic acquisition profile for the source S<sub>1</sub> of 2570 in<sup>3</sup>

## 1.3 Description and summary of Ifremer's mitigation measures

### 1.3.1 Before the campaign

The scientific teams are informed of the mitigation measures defined by Ifremer when bidding on oceanographic campaigns. Any campaign project implementing class 1 seismic sources is accompanied by a pre-study (run by Ifremer) on the planned operation's compatibility with safeguarding the marine mammals and turtle population in the area (see § 2.1) and secondly, a risk analysis on potential sounds (see § 2.2). The campaign programming (zone and study period) considers the results from this assessment and local measures that might be imposed by the host Country in response to a work authorisation request in the waters within their jurisdiction.

### 1.3.2 During the campaign

The seismic emission mitigation procedure is applicable for operations involving class 1 seismic source emissions (justification provided in § 2.1.3. and in Annexe 2 of this report), around which a warning zone and a specific exclusion zone are defined. It includes the following points:

- Marine mammal observers come on board to run visual monitoring on the zones being explored. These observers aim to detect the species of concern in the exclusion zone and within the warning zone. They also collect information on how marine mammals behave during seismic emissions.
- The seismic emissions can only start after a preliminary observation period, intended to demonstrate that there are no cetaceans in the exclusion zone; this begins with a progressive ramp-up; this phase must allow any animals possibly present in the area to move far enough away from the seismic source.
- If species of concern are detected inside the exclusion zone defined around the seismic source, emissions are immediately stopped. After these animals move away, there is a new preliminary observation period and the emissions begin again following the same initialisation procedure.
- The PAM system is deployed when required by the host country's regulations. Depending on the context, Ifremer reserves the right to deploy it and use it as supplementary equipment, strengthening the visual surveillance resources.
- The authority to request stopping the shots falls to the marine mammal observers and the PAM operators.
- MMO team/PAM operator recruitment is validated by Ifremer.

## 2 PROTECTION PROTOCOL FOR MARINE FAUNA AGAINST SEISMIC EMISSIONS FROM CLASS 1 SOURCES

*N.B.: The measures described here, and their frame of applicability, correspond to the self-regulation defined by Ifremer on its own activity implementing its seismic sources. They do not replace application of possible regulations originating from the host country's specific laws.*

The protocol presented here is a review of the preceding version (Revision 3). This update considers the latest scientific knowledge concerning acoustic risk assessment, recent guides and international recommendations [5, 6] not only aiming to protect marine mammals during seismic acquisitions (see Annexe 1) but also provide feedback from on-board observers over the last three years. In this context, this protection protocol defines the best-adapted and most relevant measures to be applied for the campaigns implementing Ifremer's most powerful seismic sources.

## 2.1 Upstream study and acoustic risks

Each campaign proposal implementing class 1 Ifremer equipment must be backed up by a prior study of the potential presence of populations of the species of concern in the zone, possibly leading to planning the envisaged operations. This pre-study is sent to Ifremer during the initial submission phase of the campaign proposal dossiers; an ad hoc committee meets to analyse it.

Depending on the pre-study's conclusions, Ifremer reserves the right to propose programme planning for the envisaged jobs (particularly programming dates) or even refuse the request.

The preliminary examination modalities and the assessment results are announced to the teams submitting a campaign proposal which is subject to this procedure.

### 2.1.1 Protected zones

Ecologically important zones for marine mammals (feeding, reproduction, birthing zones, migration corridors, and zones known for being potential habitats of deep divers) must be subject to in-depth and specific protection measures. The knowledge required to identify these zones is essential and a specific effort should potentially be made to collect this data in the literature.

### 2.1.2 Species of Concern

Marine mammals are classified into 6 categories depending on their hearing abilities. Weighting functions and hazard thresholds were defined for each of these groups [5, 6].

The protocol is applied for the following species:

- All Baleen whales,
- The large toothed whales (sperm whale, orca, false killer whale, pilot whale, beaked whale, Risso's dolphin),
- All VHF cetaceans.

As the protocol applies for very powerful seismic sources deployed out at sea, coastal mammals (seals and sea-cows) are not part of the SoC.

Sea turtles are, however, considered as SoC and are subject to specific mitigation measures, see § 2.2.8.

Fast-swimming, small oceanic dolphins are often seen in the ship's wake, therefore at more than 100 m from the seismic source and consequently outside the physiological risk zone for these species (the calculated exclusion radius is around 13 m considering the source directivity, see § 1.2.3). Consequently, the protocol does not consider these small oceanic dolphins (such as *Stenella* or *Delphinus* species which mainly live on the surface or sub-surface). However, in the event of specific regulations to protect these species applied by the host country, they will then be considered as SoC. Furthermore, if a species in the zone cannot be identified by the observers, they will apply the precautionary principle.

### 2.1.3 Acoustic risk study

The sound emission mitigation protocol is applied only to class 1 and the exclusion radius is set at 500 m, which means that acoustic sources are stopped when a SoC enters this safety perimeter.

These protection measures adapted by the Ifremer are very cautious for several purposes:

- The cumulated SEL received by the mammal is estimated by integrating the emission corresponding to the passing of the vessel at the CPA in order to incorporate the strongest contribution to the sound exposure. It considers the shot rate and the vessel speed. Transmission losses, directivity and weighting functions are also considered;
- The limit between the two classes after the calculations is situated at 800 in<sup>3</sup>. The choice of a limit at 500 in<sup>3</sup> is therefore conservative;
- Depending on the chosen cetacean group and assessment criterion, the calculation gives exclusion radii between 100 m (LF category) and 400 m (VHF category). The choice of a single radius of 500 m is therefore very conservative as it considers the VHF category, that can barely be seen at sea.

## 2.2 Measures applied during the campaign

### 2.2.1 Exclusion zone and alarm zone

The exclusion zone is defined by a circle around the seismic source with a radius of 500 m. Outside this zone, the probability of physiological damage among the SoC is considered to be negligible. This zone is watched over by the mitigation team during seismic acquisition periods (pre-shot research, ramp-up of sources and full-powered shot). As soon as a SoC is detected in this zone, operations are postponed or stopped, depending on the acquisition process phase.

The alarm zone is defined by a 1.5 km radius around the source. Any visual detection of the SoC inside this zone implies that information must be immediately exchanged by radio between the MMO team, PAM operators and the Genavir seismic team. The animal's behaviour must then be observed very closely.

The alarm zone radius for the PAM system is unlimited. Consequently, in daytime, any acoustic detection must be immediately transmitted (by radio) to the MMOs.

### 2.2.2 Visual monitoring

Two MMOs must be at their posts for the entire duration of the seismic activities, from sunrise to sunset to monitor the zones and report any presence of the SoC. This period therefore includes dawn and dusk unless the light is not good enough to make effective observations. The MMO in charge will make a decision on light levels. Breaks are required to maintain concentration. It is recommended to bring 3 observers on board so they can rotate their watch. In the event of using PAM, the total number of observers (MMOs + PAM) will be adapted to the specific nature of the campaign (nature and duration of the works).

The observers must be positioned at a point on the vessel that is high enough to give them a clear, effective view to detect marine mammals, generally the upper deck or the bridge.

Animals are detected with the naked eye. Binoculars can then be used to identify and locate the animal. In general, the distance is calculated from the number of crosshairs separating the horizon from the observation.

The observers have full authority to stop the shots if the SoC are present in the exclusion zone. They also play an advisory and expert role for the ship and for the scientific mission, in situations that require specialist opinions.

### 2.2.3 Acoustic monitoring

Due to the current limitations of PAM system performances, its deployment is not systematic and depends on the regulations that might be applied in the country in question. However, Ifremer reserves the right to impose this system for some campaigns, defined case by case, depending on the zone and the period being considered plus characteristics of the sources being implemented. If it is used, the specific protocol defined below will be applied.

A PAM operator must be available for the entire duration of the seismic activities. As for sighting by MMOs, in the event of acoustic detection of SoC in the exclusion zone, the order to stop the shots is given by the PAM operators. The PAM data will be systematically recorded for each acoustic and/or visual detection, whether this is inside or outside the zones, and during the operators' break.

In real time, it is very difficult to differentiate the different species of oceanic dolphins acoustically. Out of caution, the order to stop shots is given when the PAM operator can locate several lines of clicks emitted by small non-identified cetaceans when visual observations cannot provide accurate species identification.

For HF (high frequency) clicks (>100 kHz), location is not necessary because the signals emitted at these frequencies are absorbed quickly, practically preventing detection at distances over 500 m. Detecting HF clicks therefore indicates that marine mammals are inside the exclusion zone.

More generally, the acoustic location of marine mammals with the Ifremer PAM 2D system is a complex, inaccurate process because of its specific geometric configuration. In this case, the triangulation calculation is only accurate if the animal is moving slowly,

a valid hypothesis for sperm whales and beaked whales, for example. On the other hand, for most oceanic dolphins, this condition is no longer respected, and location inaccuracy can be high. The order to stop shots thereby relies on the PAM operators' skills and experience, judging whether the situation justifies stopping the shots. Possible discussions on detection and location of animals, if necessary, can only take place once the air guns have stopped.

At night or in poor visibility, when the PAM system encounters a technical issue affecting its operation, the seismic acquisitions can continue for 30 minutes, the time allotted to the operator to assess the incident. Once this time is up, if the PAM needs to be repaired, then the seismic shots can continue for one hour, subject to a SoC being detected by the PAM in the exclusion zone during the two hours before it stops. Once this hour has passed, if the PAM is still not repaired, seismic emissions should be stopped and cannot start again until visual observation conditions are restored.

#### 2.2.4 Pre-watch

Pre-watch aims to ensure the absence of SoC in the exclusion zone prior to any emissions. Zones that are over 200 m deep are known homes of deep divers (sperm whales, beaked whales) with long apnoea periods (> 30 min). The duration of the pre-watch or the means for detecting the presence of these deep divers is adapted to optimise observations. Table 4 defines the duration of the pre-watch depending on the water depth and the settings on the mitigation equipment. Depending on the geographic area and the season, these parameters can also be adapted.

Water depth	3 MMOs	MMOs/PAM	PAM
0 to 200 m	30 min	30 min	30 min
> 200 m	60 min		60 min

Table 4: Duration of pre-watch depending on the mitigation equipment settings and the water depth

If a visual observation and/or an acoustic detection of a SoC takes place in an exclusion zone during the pre-watch, ramp-up of seismic sources must be postponed until 30 or 60 consecutive minutes (see Table 4) have gone by without detecting SoC in the exclusion zone.

#### 2.2.5 Ramp-up

A sequence of full-power seismic shots can only take place after a soft-start or ramp-up of the source, intended to scare off any animals that might be present, and make them leave the potentially hazardous zone. The ramp-up of seismic sources stretches over a duration between 20 and 40 min and begins with emissions of the least powerful air gun on the array, thereby minimising the risk of auditory injury (for example, a Mini GI air gun typically emits a peak level of around 220 dB re 1 µPa @ 1 m when the level of the complete sources can exceed 250 dB). Then the other air guns

are successively deployed, until the maximum emission level is attained at the end of the programmed duration.

This protocol aims to protect the SoC from the seismic emissions and generally limit useless sound emissions. The soft-start should therefore be applied to minimise the time interval between its final phase of full-power shots and the profile start, namely maximum 30 min.

If a SoC is observed or detected in the exclusion zone during the ramp-up phase, the air guns are stopped. The pre-watch starts again in order to get 30 or 60 consecutive minutes pass without a new SoC observation.

It is authorised to return to full-power shots without a soft-start phase after stopping for less than 15 minutes and if the detection of SoC in the exclusion zones is negative from MMOs and PAM operators. This arrangement does not concern stops caused by the presence of SoC in the exclusion zone.

### 2.2.6 Stopping shots

As soon as a SoC enters the exclusion zone, the MMOs and/or PAM operators have the authority to stop the seismic shots: The stopping order is given directly to the Genavir technicians, by UHF radio. Straight after, the MMOs and/or PAM operators inform the deck officer, the captain and the project leader. Shots must be stopped immediately.

The pre-watch starts again when the animals that were detected are outside the observers' field of view, so that 30 or 60 consecutive minutes pass without spotting a SoC.

However, when small oceanic dolphins are considered as SoC and because they are fast swimmers, ramp-up of sources can restart as soon as they are no longer observed or detected in the exclusion zone.

Furthermore, observers warn the seismic team as soon as animals approach the exclusion zone (concept of warning zone, see §2.2.1) to be able to anticipate a possible stop in the shots and minimise the reaction time.

### 2.2.7 Change of profile

When the campaign proposal file is handed in, the intention to collect seismic data during gyrations to meet scientific goals must be demonstrated by the project leader. The gyration phases are then considered as seismic survey zones over the study zone and are subject to the same surveillance constraints. Only in this case can the seismic shots continue during the gyrations.

Otherwise, only the smallest air gun can keep working during the gyrations. Before restarting the acquisitions in nominal emission conditions, ramp-up should be applied for 20 to 40 minutes before the profile start.

### 2.2.8 Specific case of turtles

Sea turtles are capable of perceiving sound signals within a 50 to 1000 Hz range. However, right now, the hazard thresholds are unknown [15 to 21]. Three countries (Brazil, Canada and the United States) have included turtles among SoC. Because they are small and they swim on the surface, they can only be spotted at short distances even in good weather conditions; therefore, an exclusion radius of 500 m cannot be applied.

Practically, we have a 100 m exclusion distance around the vessel. As soon as a turtle is seen inside this zone, operations are stopped for 5 minutes, giving the vessel time to move far enough away from the turtle. The seismic shots can restart fully after these 5 minutes if the turtle is no longer spotted within a 100 m radius of the vessel.

### 2.2.9 Qualifications of the MMOs and PAM Operators

It is essential that the MMOs and the PAM operators are independent of Ifremer, Genavir and the on-board scientific team, to be able to do their work impartially with no conflicts of interest.

It is also primordial that the MMOs and the PAM operators are qualified and experienced. The MMOs must be able to justify prior experience<sup>2</sup> in observation at sea and running studies on land, as well as sufficient knowledge on identifying marine mammals and their ecology. They must be capable of following strict scientific protocol and entering data rigorously in a computer database. The MMOs must have quick reflexes, good interpersonal skills and be able to make and assume decisions (stopping shots, engaging a range of procedures) that influence the progress of the scientific mission. They must be capable of offering advice to crew, seismic technicians and the scientific team in certain situations or explain the situation to them and any decisions that have been made.

The PAM operator must be able to prove their experience in real-time detection of marine mammals and appropriate training. He/she must be capable of using the *PamGuard* software and configuring it, be familiar with the equipment and be able to give advice if it is not working properly. He/she must have prior experience of field studies, quick reflexes and be able to make decisions.

Before each campaign, Ifremer and the service provider organise an informative meeting on applying the campaign's mitigation and measurement protocols for the whole mitigation team. Under no circumstances can this meeting be their entire qualification or experience: it aims to inform the MMOs and the PAM operators about any specific measures that will be applied during the campaign and the observation methods recommended by Ifremer, although the personnel should already have the necessary theoretical and practical knowledge. It is also strongly encouraged to recruit personnel with dual MMO/PAM skills to be able to relay operators if necessary (such as during lunch breaks).

The information meeting covers several major topics:

- Basic principles and presentation of the seismic tools,
- Scientific goals and deployment of the seismic campaign,
- Basic knowledge of underwater acoustics,
- Acoustic impacts,
- Species present in the work zone,
- Protection protocol for the species concerned,
- Organisation of the work and responsibilities on-board.

---

<sup>2</sup> However, the MMOs and PAM operator team can be made up of seniors managing juniors in training. We understand a Junior to be a person who has been trained but has no field experience.

Before the start of seismic operations, the MMOs/PAM team manager must present the mitigation protocol that will be applied and the organisation of his/her on-board team and the responsibilities of each team to the entire scientific team, Genavir operational technicians and crew members involved. Remember that the project leader should be informed about this protocol during the campaign preparation meeting with DFO/PON at the latest.

#### 2.2.10 Data collection

Data collection is a crucial point in this type of campaign. A certain amount of information must be systematically collected to be able to exploit the acquired observation data as much as possible.

Throughout the observation periods, the environmental conditions must be reported regularly, in coherence with the observations made by the crew: sea conditions, weather conditions, dazzle, etc. The vessel's activity must also be reported (on-going works, speed, direction, etc.). These parameters must be updated as soon as one of the conditions has changed. The start and end times must be noted for each observation period during which all parameters are stable. UTC time is used to be compatible with the vessel log recordings (or other navigation software or crew monitoring).

Each SoC observation must be noted, whether it took place inside or outside the exclusion zone. The species identification must be filled in as far as possible, plus the number of individuals, the behaviour of the animals, the distance and the bearing from the vessel.

The information is noted on standardised forms (see Annexe 4 and 5) during the observation periods and then entered in the database. Centralisation in a single, unique database is essential to ensure data harmonisation and standardisation.

Abiding by the protocol, standardisation of procedures and data, and collecting all the necessary parameters guarantee scientifically rigorous exploitation of the acquired data. The behaviour observations collected during the seismic emissions are pertinent data to study the impact of this type of activities on marine mammals and possibly make changes to the applicable protocols.

It is encouraged to take photos to be able to subsequently identify the species that could not be identified on the spot or to confirm in situ identifications. However, taking photos should not affect the quality of the observations and the surveillance, or the fast response, that remain a priority.

In addition to spotting the SoC during seismic acquisitions, the mitigation team is encouraged to collect data on marine megafauna as a whole and human activities when this is possible (without damaging the application of the mitigation procedure).

Outside the shot period, the MMOs will collect data on the marine megafauna as a whole and human activities according to the non-shooting protocol that will be sent to them during the information meeting.

### 2.2.11 Reporting

As a result of the campaign, the MMOs and the PAM operators must draft a report on the mission's progress in chronological order, the observations made, the situations encountered, when the shots were stopped and under which circumstances. The report should also sum up the difficulties encountered, whether a solution was found, and improvements that might be made in the future, in compliance with the section given in Annexe 6. Furthermore, a weekly summary report is requested from the MMO/PAM team leader. All these reporting activities are governed contractually. Furthermore, all the digital data (photos, xls data collection and analysis files, GIS maps and shapefiles) should be returned to Ifremer when handing in the provisional report.

## 3 CONCLUSIONS

The protocol chosen by Ifremer to prevent risks and mitigate sound emissions to protect the SoC (marine mammals and sea turtles) is applicable when the institute's seismic equipment is implemented, with modalities depending on the characteristics of the sources being used (Class 1 seismic sources).

It includes a set of rules defined according to current scientific knowledge in this field [5, 6]. It is therefore logically very similar to the recommendations defined by other international players in different fields (scientific, industrial, and environmental) and based on the same scientific elements.

Remember that this protocol is an autoregulation defined by Ifremer to manage its activity. It does not exclude applying other measures that might be requested, for example, within the framework of a national or regional regulation.

Finally, Ifremer reserves the right to develop this protocol depending on subsequent progress in scientific knowledge, available techniques, acquired field experience and observations.

## 4 BIBLIOGRAPHY

[1] Convention on the Law of the Sea (with appendices, final document and rectification reports on the final document dated 3 March 1986 and 26 July 1993) signed in Montego Bay on 10 December 1982, RTNU, came into force on 16 November 1994.

[2] **Ducatel, C, Le Gall, Y, Lurton, X. (2016).** Contrôle des risques sonores pour les mammifères marins - Protocole Ifremer pour les émissions sismiques. Brest, France: Ifremer IMN/NSE/ASTI-2016- 5.

[3] **Lurton, X. and Antoine, L. (2007).** Analyse des risques pour les mammifères marins liés à l'emploi des méthodes acoustiques en océanographie (Rapport final). Brest, France: Ifremer DOP/CB/NSE/AS/07-07.

[4] **Lurton X. (2016).** Modelling of the sound field radiated by multibeam echosounders for acoustical impact assessment. Applied Acoustics (Elsevier BV), 2016-01, Vol. 101, P. 201-221, [10.1016/j.apacoust.2015.07.012](https://doi.org/10.1016/j.apacoust.2015.07.012)

[5] **National Marine Fisheries Service. (2018).** Revisions to: Technical Guidance for Assessing the Effects of Anthropogenic Sound on Marine Mammal Hearing (Version 2.0): Underwater Thresholds for Onset of Permanent and Temporary Threshold Shifts. U.S. Dept. of Commer., NOAA. NOAA Technical Memorandum NMFS-OPR-59, 167 p.

[6] **Southall, B. L., Finneran, J.J., Reichmuth, C., Nachtigall, P. E., Ketten, D.R., Bowles, Ann. E., Ellison, W. T., Nowacek, D. P., Tyack, Peter.L. (2019).** Marine Mammal Noise Exposure Criteria: Updated Scientific Recommendations for Residual Hearing Effects. Aquatic Mammals 2019, 45(2), 125-232, DOI 10.1578/AM.45.2.2019.125.

[7] **Ducatel, C, Le Gall, Y, Lurton, X. (2019).** Evaluation des risques sonores des sources sismiques. Brest, France: Ifremer IMN/NSE/ASTI-2019-147.

[8] **Lurton X. (2010).** An Introduction to Underwater Acoustics – Principles and Applications, Second Edition, Springer-Verlag, Berlin, 680 pp

[9] **Southall, B. L., Bowles, A. E., Ellison, W. T., Finneran, J. J., Gentry, R. L., Greene, C. R., Kastak, D., Ketten, D. R., Miller, J. H., Nachtigall, P. E. et al. (2007).** Marine Mammal Noise Exposure Criteria: Initial Scientific Recommendations. Aquatic Mammals 33, 411-521.

[10] Erbe, C., Reichmuth, C., Cunningham, K., Lucke, K., Dooling, R., (2016). Communication masking in marine mammals: A review and research strategy. *Mar. Pollut. Bull.* 103, 15–38. doi:10.1016/j.marpolbul.2015.12.007

[11] Finneran, J.J., (2015). **Noise-induced hearing loss in marine mammals: A review of temporary threshold shift studies from 1996 to 2015.** *J. Acoust. Soc. Am.* 138, 1702–1726. doi:10.1121/1.4927418

[12] Finneran, J.J., Jenkins, A.K., (2012). Criteria and thresholds for US Navy acoustic and explosive effects analysis (Technical report). DTIC Document.

[13] Finneran, J.J., (2016). Auditory Weighting Functions and TTS/PTS Exposure Functions for Marine Mammals Exposed to Underwater Noise. Space and Naval Warfare Systems Center Pacific San Diego United States, San Diego, California.

[14] Ketten, D.R. (2009). Marine mammal auditory systems: summary of audiometric and anatomical data and its implication for underwater acoustics impacts. NOAA-Technical Memorandum NMFS-SW FSC-256.

[15] BARTOL, S.M., KETTEN, D.R., (2006). Turtle and tuna hearing. In: Swimmer, Y., Brill, R. (Eds.), *Sea Turtle and Pelagic Fish Sensory Biology: Developing Techniques to Reduce Sea Turtle Bycatch in Longline Fisheries* Technical Memorandum NMFS-PIFSC-7. National Ocean and Atmospheric Administration (NOAA), US Department of Commerce, pp. 98–105.

[16] LAVENDER, A.L., BARTOL, S.M., BARTOL, I.K., (2014). Ontogenetic investigation of underwater hearing capabilities in loggerhead sea turtles (*Caretta caretta*) using a dual testing approach. *J. Exp. Biol.* 217, 2580–2589. <http://dx.doi.org/10.1242/jeb.096651>

[17] LENHARDT, M., (1994). Seismic and very low frequency sound induced behaviors in captive loggerhead marine turtles (*Caretta caretta*). *Proceedings of the Fourteenth Annual Symposium on Sea Turtle Biology and Conservation*. NOAA Technical Memorandum NMFS-SEFSC-351, pp. p238– p241.

[18] MARTIN, K.J., ALESSI, S.C., GASPARD, J.C., TUCKER, A.D., BAUER, G.B., MANN, D.A., (2012). Underwater hearing in the loggerhead turtle (*Caretta caretta*): a comparison of behavioral and auditory evoked potential audiograms. *J. Exp. Biol.* 215, 3001–3009. <http://dx.doi.org/10.1242/jeb.066324>.

**[19] Piniak, W., Eckert, S., Harms, C., Stringer, E., (2012).** Underwater hearing sensitivity of the leatherback sea turtle (*Dermochelys coriacea*): assessing the potential effect of anthropogenic noise. In: U.S Department of the Interior Bureau of Ocean Energy Management (Ed.), U.S. Dept. of the Interior, Bureau of Ocean Energy Management, Headquarters, Herndon, VA. OCS Study BOEM 2012-01156.

**[20] DERUITER, S., LARBI DOUKARA, K., (2012).** Loggerhead turtles dive in response to airgun sound exposure. *Endanger. Species Res.* 16, 55-63. <http://dx.doi.org/10.3354/esr00396>.

**[21] Nelms, Sarah & Dow Piniak, Wendy & Weir, Caroline & Godley, Brendan. (2016).** Seismic surveys and marine turtles: An underestimated global threat? *Biological Conservation.* 193. 49-65. [10.1016/j.biocon.2015.10.020](https://doi.org/10.1016/j.biocon.2015.10.020).

## 5 ANNEXES

### 5.1 Annexe 1: References to the main guides and conventions

The table below provides a non-exhaustive list of the main texts concerning underwater noise and marine fauna. Most of these recommended international conventions, guides, standards and procedures are political and not legally binding. However, by applying the principle of the Rio Declaration on the environment and declaration, precautionary measures are imposed.

ORGANISATIONS	REFERENCES	DESCRIPTION
<u>ACCOBAMS</u>	Resolution 2.16	Assessment and its impact and impact assessment of man-made noise
	Resolution 3.10	Guidelines to address the impact of anthropogenic noise on marine mammals in the ACCOBAMS air
	Resolution 4.17	Guidelines to address the impact of anthropogenic noise on cetaceans in the ACCOBAMS area.
	Resolution 6.17	Anthropogenic noise
	Resolution 6.18	Implementation of an ACCOBAMS Certification for Highly Qualified Marine Mammals Observers
<u>ASCOBANS:</u>	Resolution 5.4	Adverse effects of sound, vessels and other forms of disturbance on small cetaceans.
	Resolution 6.2	Adverse effects of underwater noise on marine mammals during offshore construction activities for renewable energy production.
<u>CDB</u>	Decision VIII / 28	Voluntary guidelines from the CBD on the biodiversity-inclusive impact assessment.
	Decision XII / 23	Recommendation to use quieter technologies and applying best available practices in all relevant activities.
<u>CMS</u>	Resolution CMS 9.19	Anthropogenic marine/ocean noise impacts for cetaceans and other biota.
	Resolution CMS 10.24	Further steps to abate underwater noise pollution for the protection of cetaceans and other migratory species.
	UNEP/CMS/COP12/Doc.24.2.2	Guidelines on environmental impact assessments for marine noise-generating activities.
	UNEP/CMS/Resolution 12.14	Resolution adopted by all the UN Member States. This refers to a guide

		concerning assessment of environmental impacts for noise-generating marine activities.
<u>OSPAR</u>	ICG-Noise	ICG-Noise was set up in order to organise work into 3 sections (Pulsed noises, coordinated by Great Britain, Ambient noise coordinated by the Netherlands and Attenuation measures coordinated by Germany).
<u>EU</u>	TG Noise	Work group relating to descriptor 11 from the MSFD
<u>France</u>	The National Plan of Action for cetaceans.	(Action 43 from the biodiversity plan) envisages measures to reduce anthropogenic underwater noise.

## 5.2 Annexe 2: Seismic sources concerned by applying the protocol

### Physiological risk thresholds

The peak values ( $SPL_{PK}$ ) and the cumulated sound exposure level ( $SEL_{cum}$ ) received by the marine mammals should be compared against the physiological risk thresholds currently defined for cetaceans from all three categories (LF, HF and VHF) and for pulsed signals emitted by air guns [5, 6]. The Ifremer protocol relies on the use of these objective thresholds defined by the physiological risks.

Group	$SEL_{cum}$ (weighted) In dB (re. $1\mu Pa^2s$ )	$SPL_{PK}$ (not weighted) En dB (re. $1\mu Pa$ )
LF	183	219
HF	185	230
VHF	155	202

*PTS thresholds for pulsed signals (according to [5, 6])*

The two thresholds with a significant impact in terms of cumulated sound exposure level and peak level received are:

- **$SEL_{cum} = 183$  dB (re.  $1 \mu Pa^2s$ ) for the LF category<sup>3</sup>,**
- **$SPL_{PK} = 202$  dB re.  $1 \mu Pa$  for the VHF category.**

### Seismic sources concerned by the protection measures

The Ifremer procedure for emission mitigation is systematically applicable in the case of very powerful seismic emissions for which received level determination stops at exclusion distances over 100 m.

#### Cumulated sound exposure level

Considering the threshold at 183 dB (re.  $1 \mu Pa^2s$ ), the exclusion radius in terms of  $SEL_{cum}$  was estimated using a calculation along the standard seismic profile, for the two powerful Ifremer sources described in Annexe 3.

For Ifremer sources  $S_1$  (14 air guns;  $V = 2570$  in<sup>3</sup>; shot rate: 20 s) and  $S_2$  (16 air guns;  $V = 4990$  in<sup>3</sup>; shot rate: 60 s), the exclusion radii are respectively 114 and 103 m, therefore very close to the 100 m limit beyond which the mitigation protocol is applied.

**The threshold for the cumulated sound exposure level at a distance of 100 m is therefore only passed by very powerful seismic sources (reflection or refraction) with an important volume (> 2500 in<sup>3</sup>).**

<sup>3</sup> Owing to the application of frequency weighting functions that actually eliminate the HF and VHF categories from the impact of seismic signals at very low frequencies

### Peak sound level received

For a peak sound level received at 100 m equal to the maximum acceptable value (202 dB re. 1  $\mu$ Pa), it is possible to move up to the source emission level at the reference distance ( $R_0$ ) of 1 m:

$$SL_{PK}(R_0) = 202 + PT(100 \text{ m}) = 202 + 40 = 242 \text{ dB re. } 1 \mu\text{Pa at } 1 \text{ m,}$$

for a transmission loss  $TL(R) = 20 \log(R/R_0)$ .

The emission level can be translated into peak acoustic pressure ( $p_{max}$ : a value that is very classically used to characterise seismic sources) at the distance ( $R_0$ ):

$$SL_{PK}(R_0) = 20 \log_{10} (p_{max} / p_{ref}) \text{ with } p_{ref} = 1 \mu\text{Pa}$$

In our case, we find:

$$p_{max} = 12.6 \text{ bar at } 1 \text{ m}$$

The *Sisource* software can be used to model the acoustic signature for arrays of air guns, working from measurements taken at sea on individual air guns. It was used here to simulate the array configuration, using *GGUN* type air guns, that generate a peak pressure level comparable with the value of 12.6 bar obtained at 1 m. One array, submerged 6 m and made up of three *GGUN* air guns of 250 in<sup>3</sup> and one *GGUN* air gun of 45 in<sup>3</sup>, transmits this acoustic pressure level:



Figure 5: Acoustic signature (*Sisource* simulation) of the source made up of 4 *GGUN* air guns (3x250 in<sup>3</sup> + 1x 45 in<sup>3</sup>)

The received peak sound level at a distance of 100 m is therefore passed for seismic sources with a volume greater than  $\sim 800 \text{ in}^3$ . The sound level threshold received by the mammals in the VHF category therefore makes a greater impact than the threshold for the cumulated sound exposure level received by mammals in the LF category.

### Seismic source classes

Working from this transitional value of  $800 \text{ in}^3$ , and applying a supplementary security factor, we have conservatively set a **limit volume of  $500 \text{ in}^3$** . We therefore chose to classify the seismic sources into two categories:

- **Class 1:** sources for which the total volume is greater than  $500 \text{ in}^3$ , where the emissions mitigation protocol will be applied,
- **Class 2:** sources for which the total volume is less than  $500 \text{ in}^3$ , where no emissions mitigation protocol will be applied, unless requested by or specific regulations from the Coastal State.

As a comparison, New Zealand applies its "standard" protocol (MMOs, PAM, pre-watch, ramp-up, ...) for seismic sources whose total volume is greater than  $427 \text{ in}^3$ , a transitional value that is highly comparable with Ifremer's chosen value.

### 5.3 Annexe 3: Acoustic characteristics of the sources

Among the Ifremer class 1 seismic sources, two types of array can be used depending on the scientific goals of the oceanographic campaigns. Table 5 summarises the acoustic characteristics of these two sound sources.

	Source 1 (S <sub>1</sub> )	Source 2 (S <sub>2</sub> )
Total volume (in <sup>3</sup> )	2570	4990
Number of air guns	14	16
Immersion (m)	6	10
Dimensions of the source (m)	9 m (longit.) x 15 m (transv.)	10 m (longit.) x 16.5 m (transv.)
Maximum pressure 0-pic (bar.m)	36.52	53.10
Shot rate: T (s)	20	60
Signal duration (s)	0.020	0.029
SL <sub>PK</sub> (dB re 1μPa @ 1 m)	251.2	254.5
SEL (dB re 1 μPa <sup>2</sup> s @ 1 m)	229.2	233.6

Table 5: Characteristics of the Ifremer Class 1 seismic arrays

#### Description of the source S<sub>1</sub>

The source S<sub>1</sub> has 14 air guns totalling an air volume of 2570 in<sup>3</sup> and it presents a shot rate of 20 seconds.

The shape of the signal over time for S<sub>1</sub> is represented in Figure 6. The maximum pressure level (in absolute value) measured on the outline  $p(t)$  is equal to 36.52 bar @ 1m, namely  $36.52 \times 10^{11}$  μPa @ 1 m. The source peak level (SL<sub>PK</sub>) at the reference distance R<sub>0</sub> of 1 m is defined as:

$$SL_{PK}(R_0) = 20 \log(36,52 \times 10^{11}) \approx 251,2 \text{ dB re } 1\mu\text{Pa @ } 1\text{m}$$

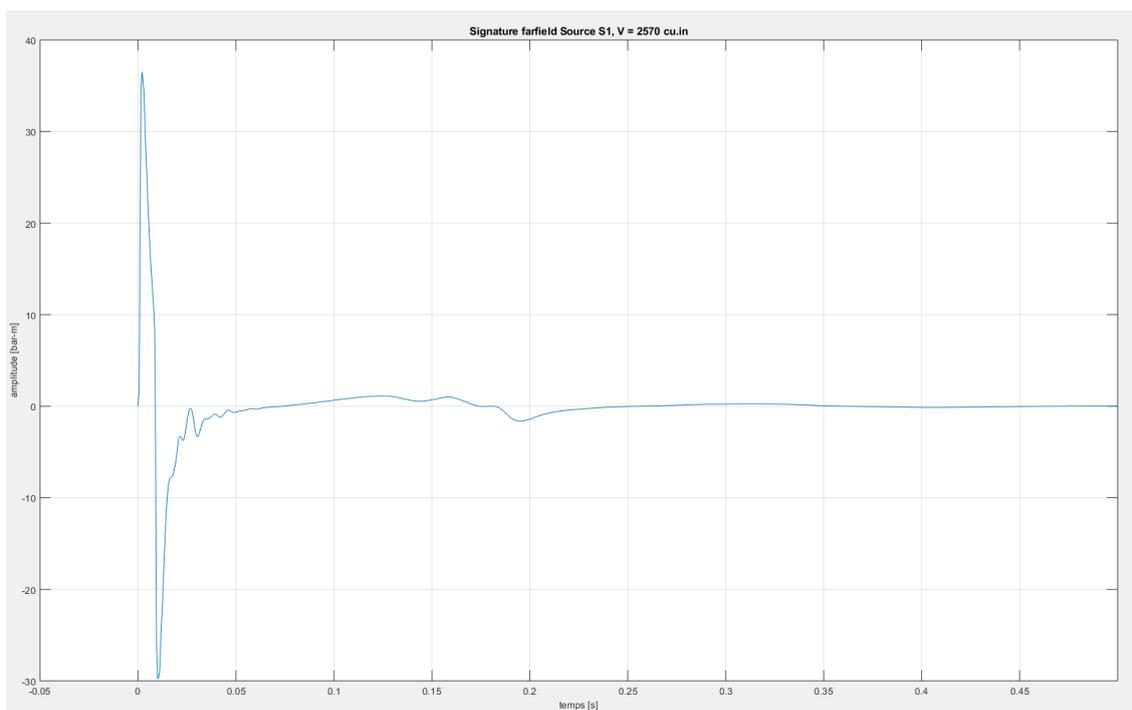


Figure 6: Time signal from the seismic source  $S$  ( $V_s=2570 \text{ in}^3$ )

Sound exposure level: ( $SEL$ : in dB re  $1\mu\text{Pa}^2\text{s}$ ) for a shot is given by the integration of the intensity over time:

$$SEL = 10 \log \int p^2(t) dt$$

In this case, working from the outline of  $p(t)$  given in Figure 4, the  $SEL$  for 1 shot is equal to 229.2 dB re  $1\mu\text{Pa}^2\text{s}$  at 1 m.

The frequency spectrum (power spectrum density) obtained by the Fourier transform of the signal  $p(t)$  is represented on Figure 7.

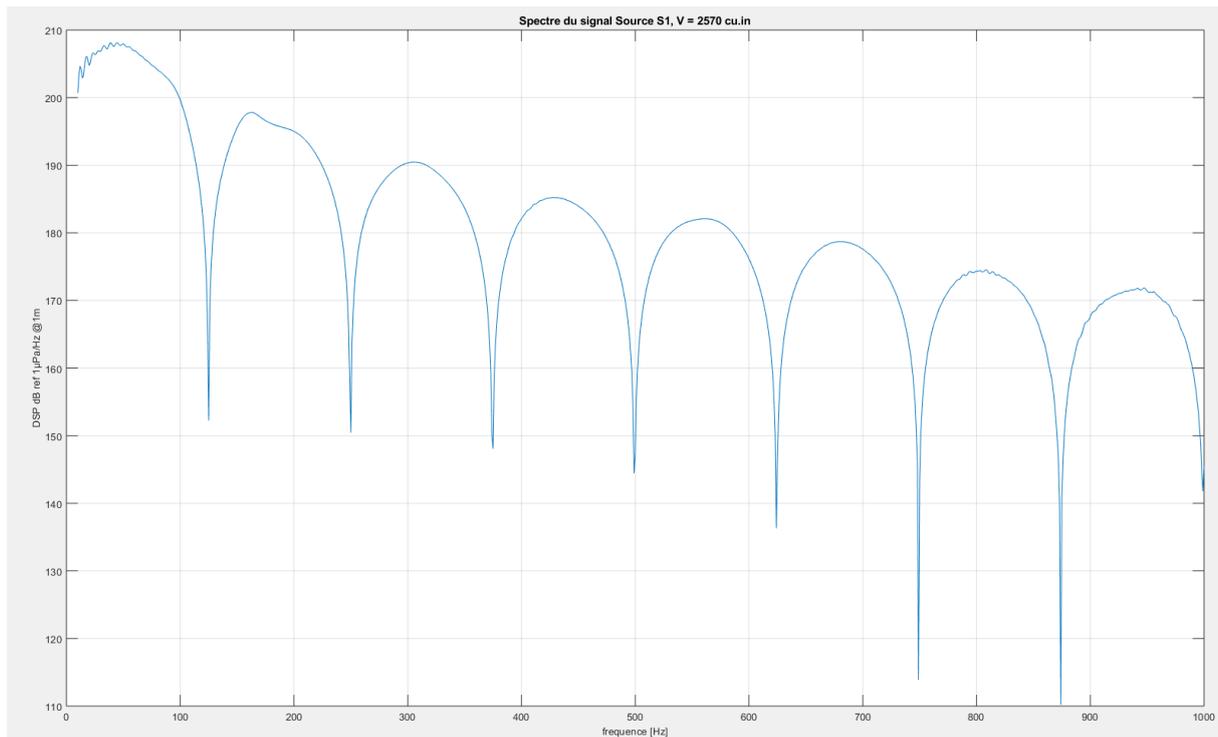


Figure 7: Frequency spectrum of the seismic signal from the source S ( $V=2570 \text{ in}^3$ )

The energy maximum (208.1 dB re  $1\mu\text{Pa}/\text{Hz}$  @ 1 m) is reached for a frequency of 45 Hz. The *SEL* calculated from the energy integral contained in the signal for the frequency range [2- 1000 Hz] is 229.2 dB re  $1\mu\text{Pa}^2 \cdot \text{s}$  @ 1 m. This value is, of course, coherent with the value obtained by integrating the time signal.

### **Modelling the Directivity Function**

Figure 8 represents the directivity function (*DF*) simulated from the seismic array  $S_1$  in the vertical plane according to the vessel's longitudinal axis, depending on the frequency from 0 to 250 Hz. This angle/frequency modelling is obtained using *Gundalf*<sup>®</sup> software, a worldwide reference in seismic array simulation.

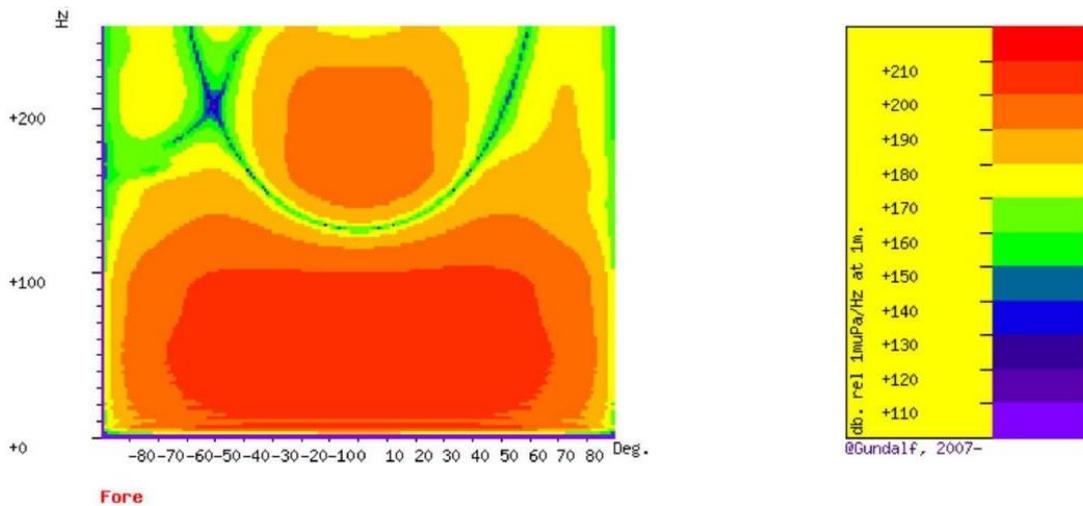


Figure 8: Directivity in the vertical/longitudinal plane, 0° tilt, seismic source  $S_1$ , Gundalf®

Figure 9 represents the directivity, simulated by Gundalf®, from the seismic array in the vertical plane and according to the vessel's transverse axis.

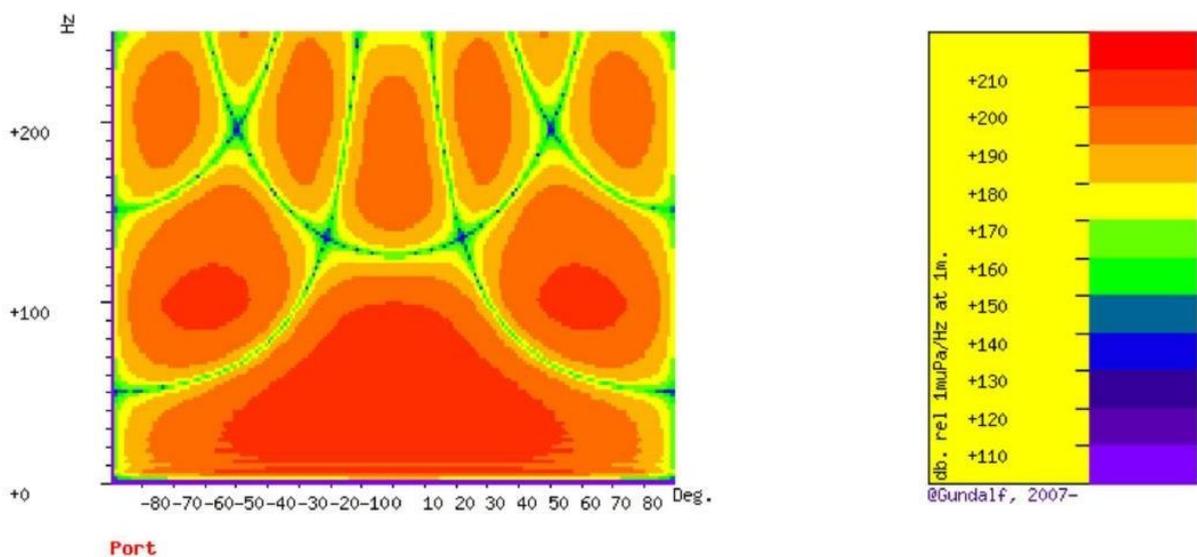


Figure 9: Directivity in the transversal plane, 90° tilt, seismic source  $S_1$ , Gundalf®

Figure 10 represents the vertical/longitudinal directivity diagrams for frequencies from 10 to 50 Hz for the source  $S_1$ .

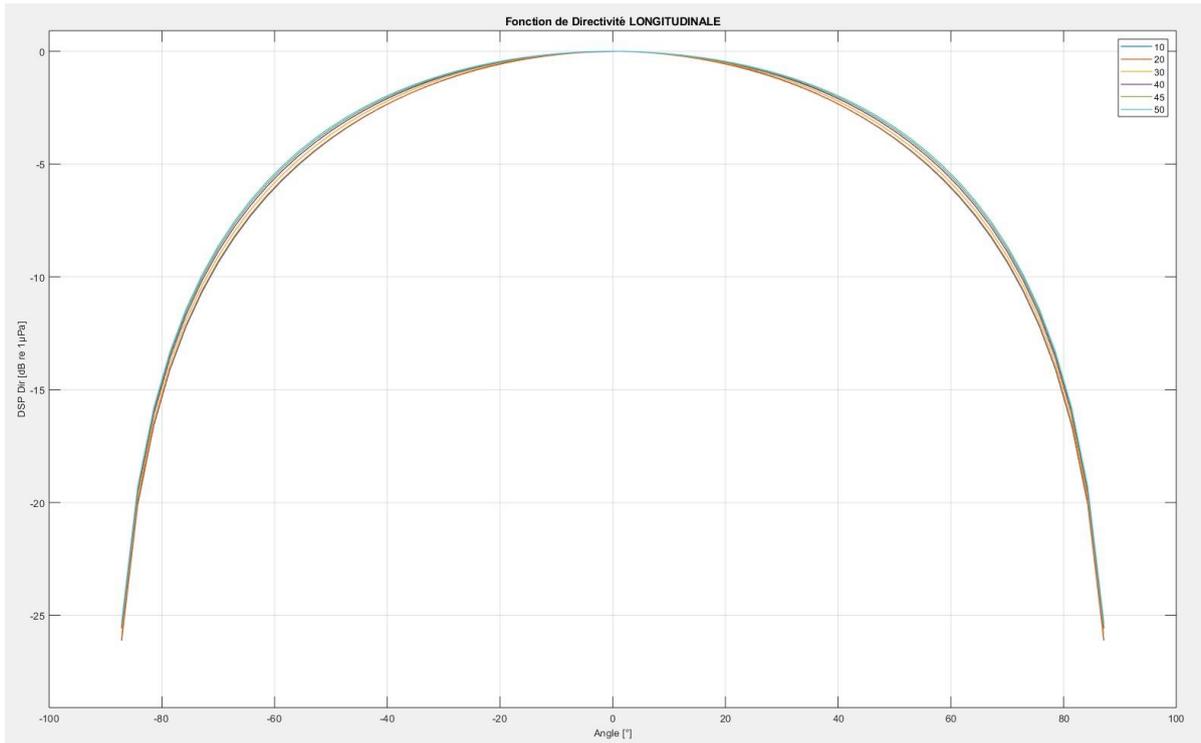


Figure 10: Vertical/longitudinal diagrams for the source ( $S_1$ )

Figure 11 represents the vertical/longitudinal directivity diagrams from 60 to 100 Hz.

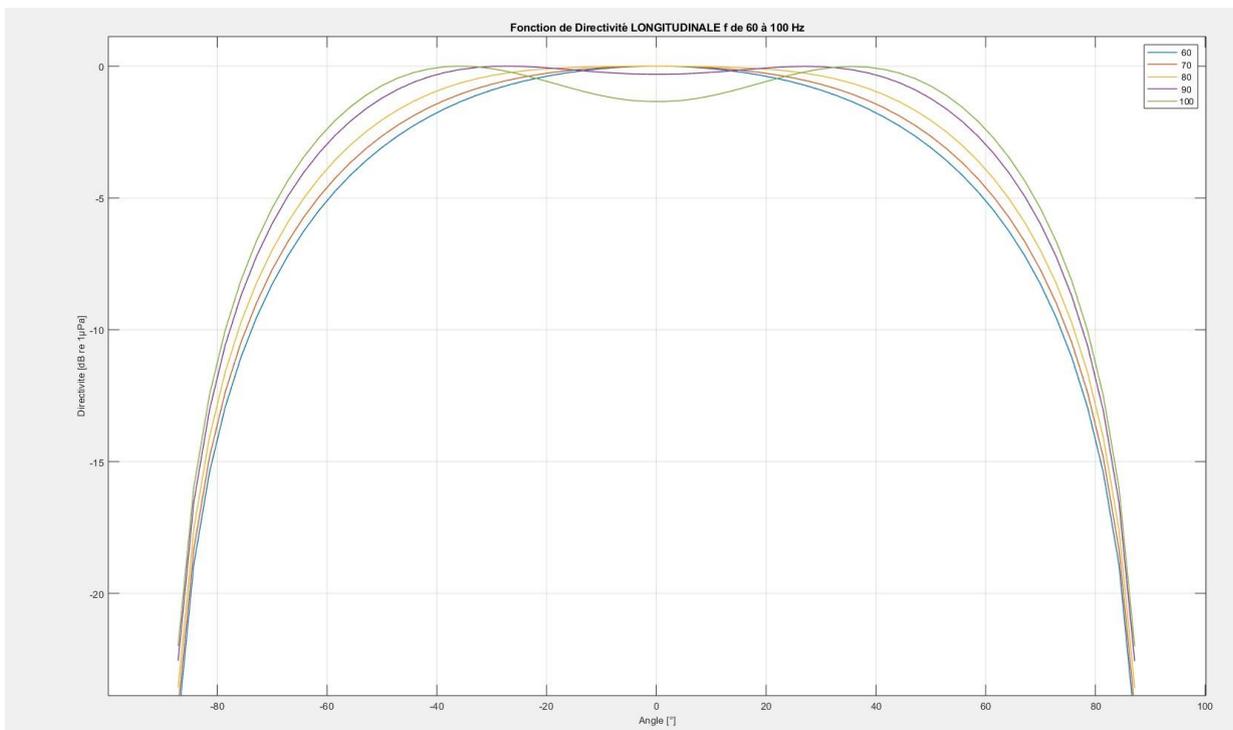


Figure 11: Vertical/longitudinal diagrams for the source  $S_1$

## Description of the source $S_2$

Figures 12 and 13 represent the shape of the signal in the time field and the frequency spectrum for the source  $S_2$ , more voluminous ( $4990 \text{ in}^3$ ) than  $S_1$ , and made up of 16 air guns emitting every 60 seconds, at an  $SL(R_0) = 254,5 \text{ dB re } 1 \mu\text{Pa @ } 1 \text{ m}$ .

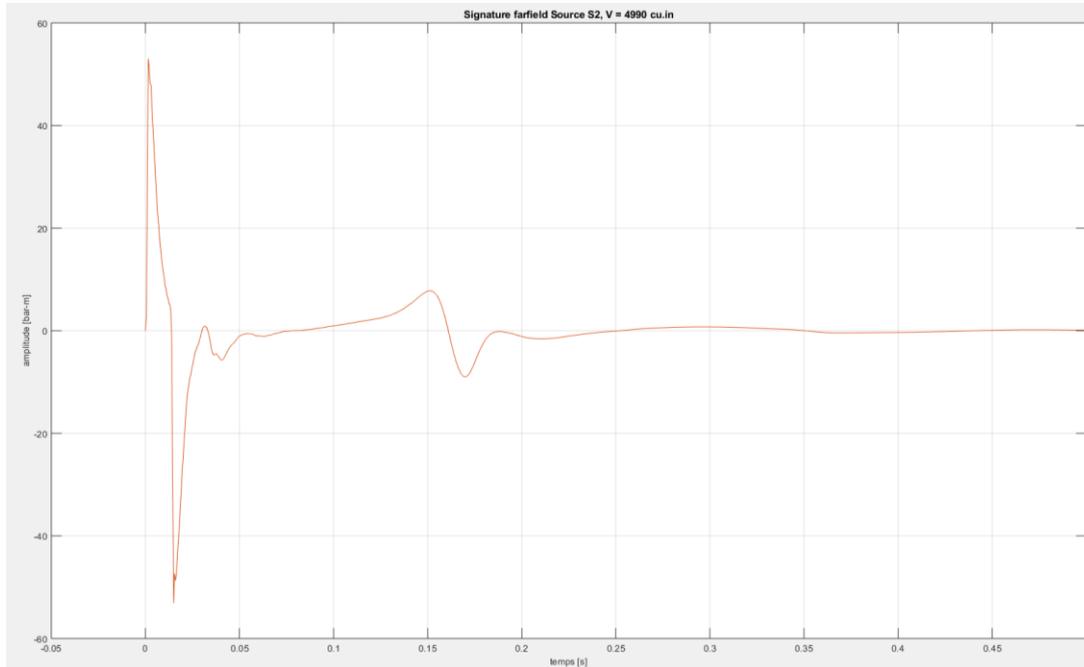


Figure 12: Time signal from the seismic source  $S_2$  ( $V=4990 \text{ in}^3$ )

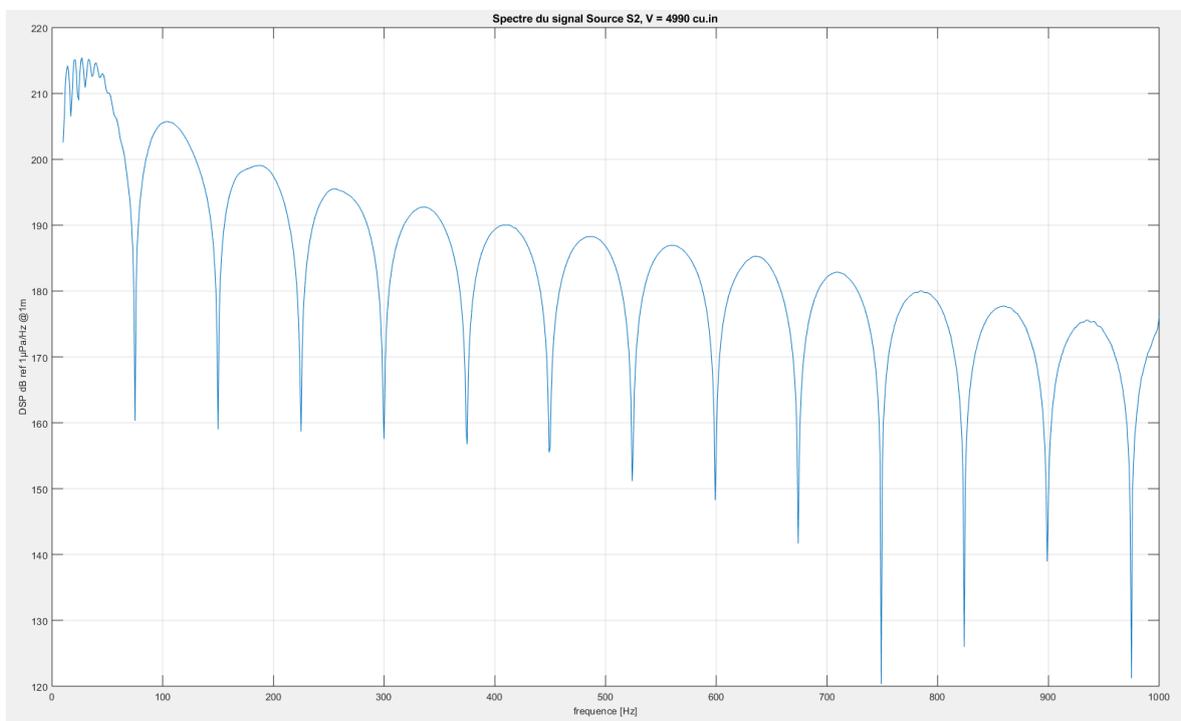


Figure 13: Frequency spectrum of the seismic signal from the source  $S_2$  ( $V=4990 \text{ in}^3$ )

For a shot, this source of 4990 in<sup>3</sup> presents a sound exposure level of 233.6 dB re 1 $\mu$ Pa<sup>2</sup>s @ 1 m. The energy maximum (215.6 dB re 1 $\mu$ Pa/Hz @ 1 m) is reached for the frequency of 27 Hz.

### Calculation the Directivity Function

Figure 14 represents the directivity function simulated from the seismic array  $S_2$  in the vertical/longitudinal, depending on the frequency from 0 to 250 Hz. This angle/frequency modelling is obtained using the *Gundalf*<sup>®</sup> software.

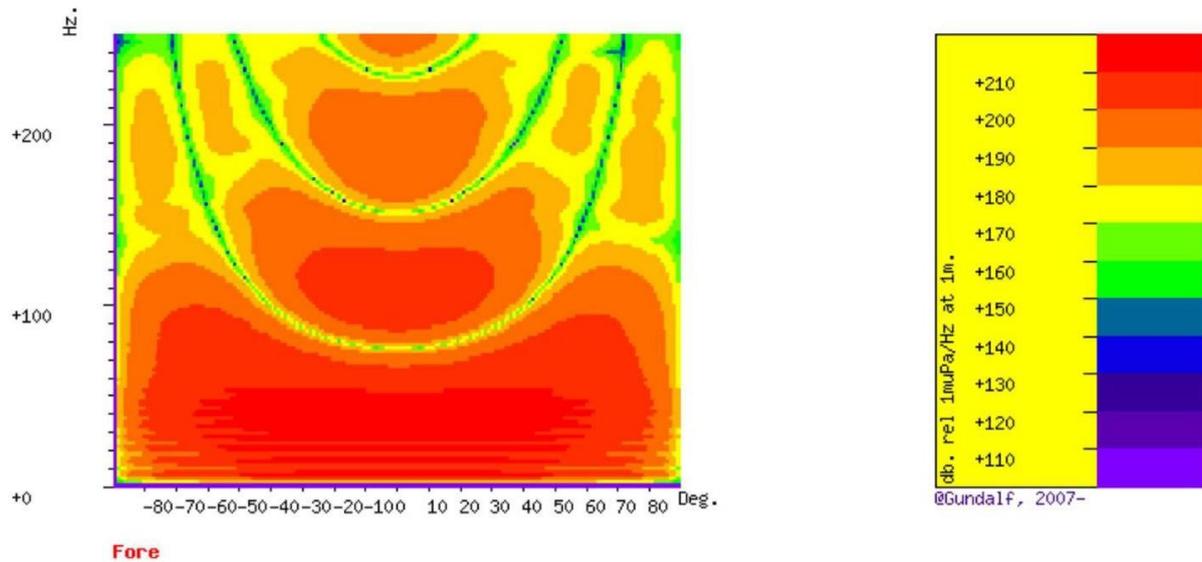


Figure 14: Directivity in the vertical/longitudinal plane, 0° tilt, seismic source  $S_2$ , *Gundalf*<sup>®</sup>

Figure 15 represents the directivity, simulated by *Gundalf*<sup>®</sup>, from the seismic array in the vertical/transversal plane.

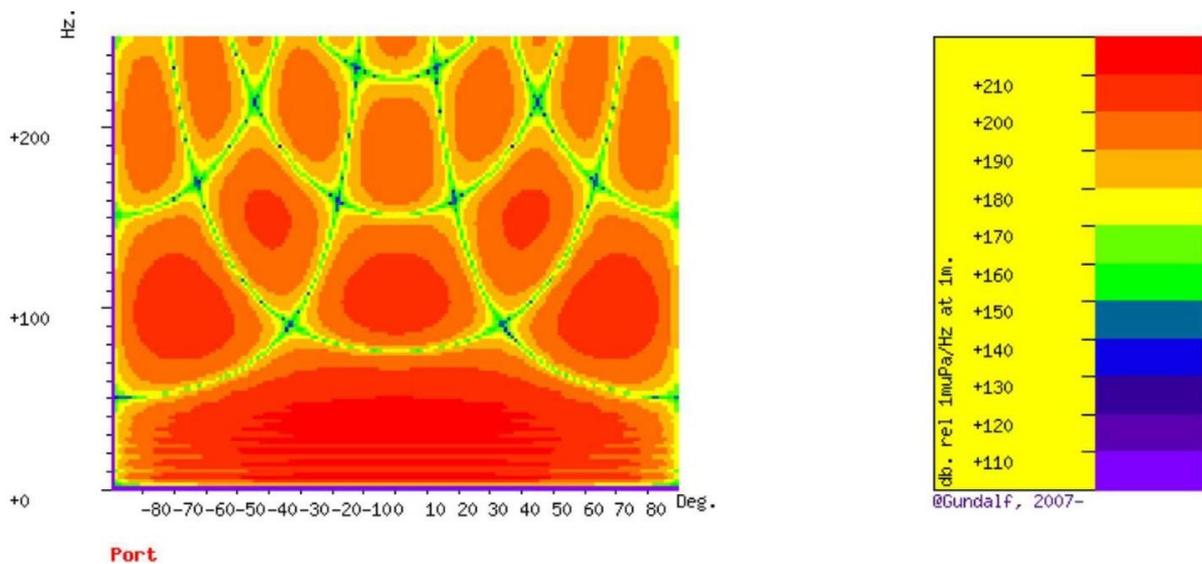


Figure 15: Vertical/longitudinal directivity, 90° tilt, seismic source  $S_2$ , *Gundalf*<sup>®</sup>

Figure 16 represents the vertical/longitudinal directivity diagrams for frequencies from 10 to 50 Hz for the source  $S_2$ .

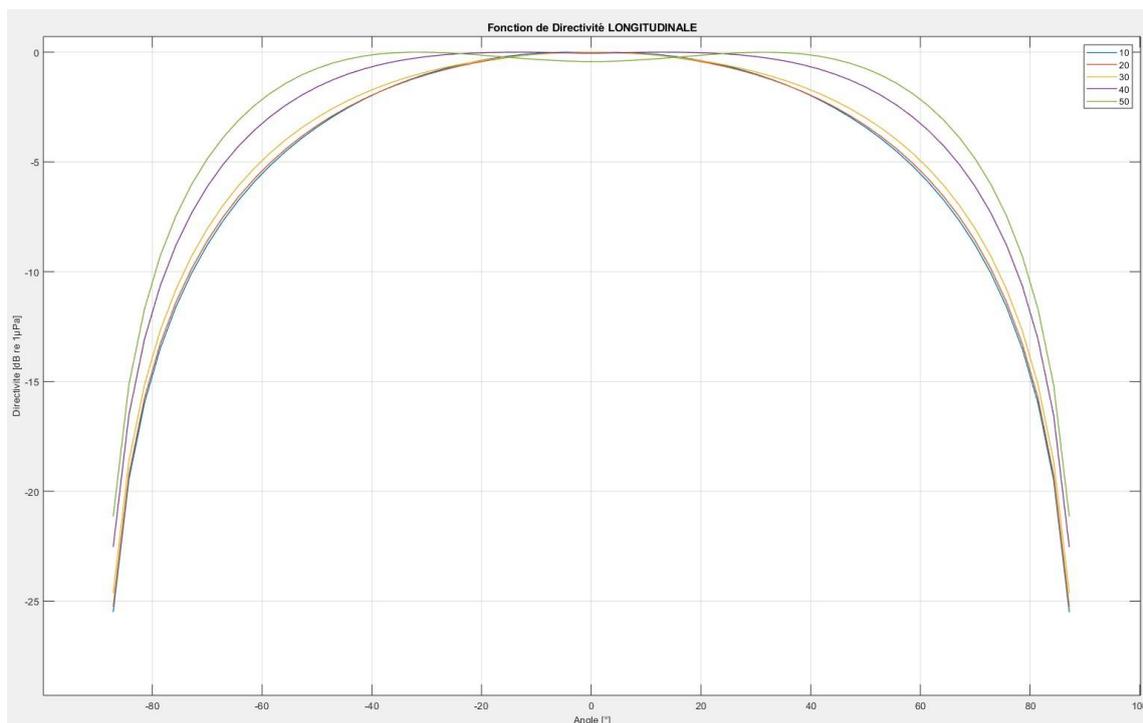


Figure 16: Directivity diagrams in the vertical plane according to the longitudinal axis of the source ( $S_2$ )

Figure 17 represents the vertical/longitudinal directivity diagrams from 60 to 100 Hz for the source  $S_2$ .

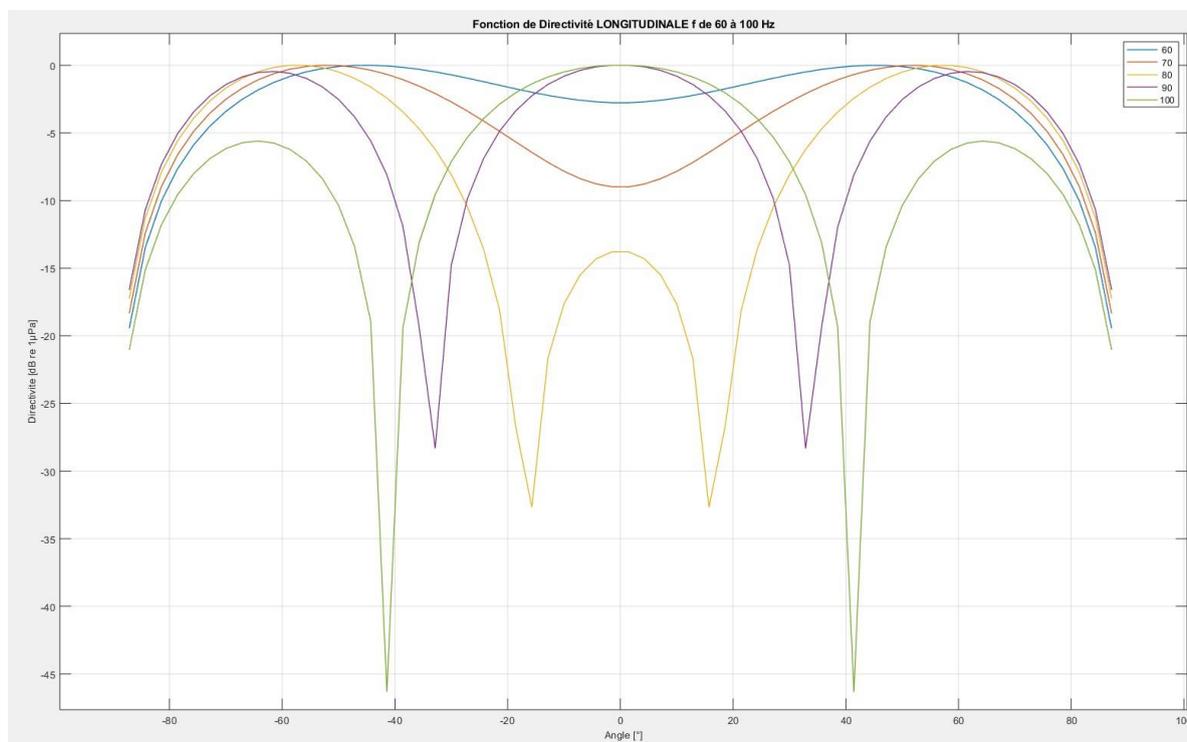


Figure 17: Directivity diagrams in the vertical plane according to the longitudinal axis of the source ( $S_2$ )

5.4 Annexe 4: Forms for MMOS and PAM operators



**Compte Rendu d'observation de Mammifères marins**

Campagne :  Navire :  Dates :

Observateur :  Affiliation :

**ENVIRONNEMENT**

Date :  Heure observation:  Vitesse navire  Cap navire

Zone :  Longitude :  Latitude :  Hauteur d'eau

Etat de mer :  T° air / eau  Pluie  Visibilité  Vitesse vent :  Direction vent :

Emission sismique :  Emission sonar :

Remarques :

**ANIMAUX OBSERVES**

Espèce :  Nombre :  Adultes/jeunes  Tailles :  Photo/vidéo

Description des animaux





### COMPORTEMENT DES ANIMAUX

En route  Arrêté  Etrave  Autre

Description du comportement

### DEPLACEMENTS PAR RAPPORT AU NAVIRE

Distance initiale au navire

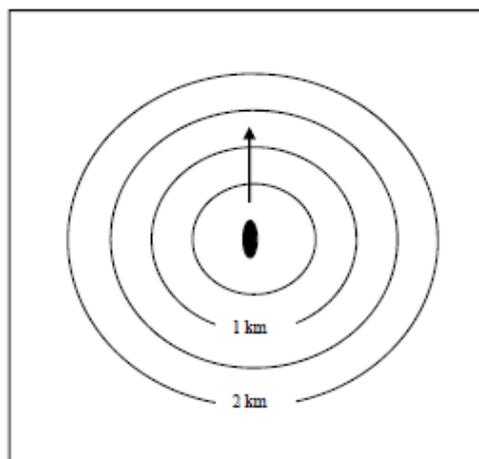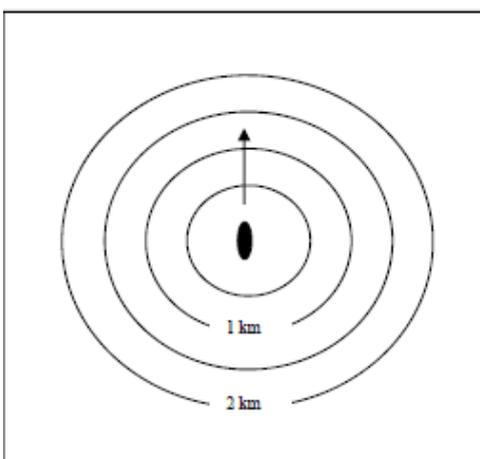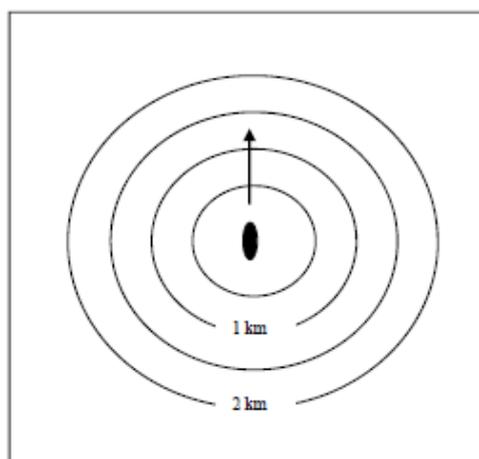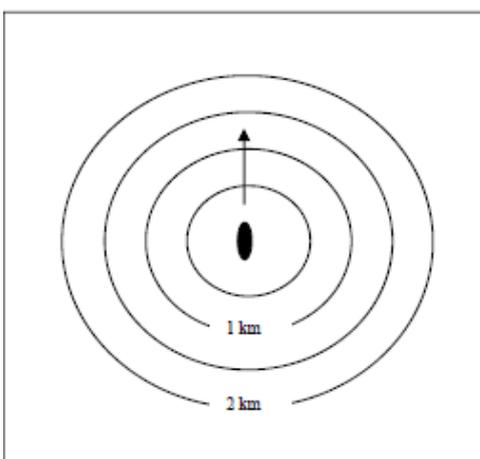

Compte-Rendu HEBDOMADAIRE				
Campagne		Dates globales de la campagne		
NOM		DATE		
Observateurs mammifères marins		A bord du navire		
NOM		NOM		
COMPTE RENDU N°X				
Date		Semaine n°X		
Horaires de travail MMO				
Horaires		Nombre d'heures sans les repas		
Temps bureau à différencier de l'effort d'observation				
Heures de travail hors observations (saisie / tri des photos / identification espèces / planning / concertations)				
RECAPITULATIF DE L'EFFORT D'OBSERVATION				
Effort général (heure)		Effort canons éteints (heure)	Effort canons allumés (heure)	
Détails des phases				
		SISMIQUE		HORS SISMIQUE
		Manœuvre	Prewatch (pré-tir)	Ramp-up
		Profils (tir à pleine puissance)		Prospection (transit)
Effort d'observation (heure)				
Nombre de phases				

RECAPITULATIF DES OBSERVATIONS			
Moyens visuels de prospection		OBSERVATION D'ESPECES	
		Espèces	Estimation du nombre d'individus
			Distances aux canons
Nombre d'arrêts des canons suite à détection de mammifères marins			
Nombre d'observations totales canons en marche			
Nombre d'observations canons éteints		Photos des observations	
Nombre d'observations de cétacés			
Nombre d'observations d'oiseaux			
BILAN SUR LE RESPECT DU PROTOCOLE			
OBSERVATIONS SUR LES OPERATIONS EFFECTUES ET L'EVOLUTION DE LA CAMPAGNE (résultats, planning opérations prévues, etc.)			
REMARQUES DIVERSES SUR LES CONDITIONS A BORD (échanges avec le bord, utilisation du matériel, mise en œuvre des protocoles, etc.)			
Conditions d'observations rencontrées (état de la mer et conditions subjectives)			

5.5 Annexe 5: EXTRACT FROM THE END OF CAMPAIGN SUMMARY FORM

**MITIGATION ACTION ON SURVEY**

		NUMBERS OF			
MARINE MAMMALS		DELAY	SHUTDOWN	NO ACTION	NONE REQUIRED
DELSPP	SMADEL <i>Tursiops spp</i>				
	SMADEL <i>stenella longirostris</i>				
	SMADEL <i>Stenella frontalis</i>				
	SMADEL <i>Stenella attenuata</i>				
	SMADEL	0	0	0	0
	LARDEL <i>Lagenodelphis hosei</i>				
	LARDEL <i>Sousa chinensis</i>				
	LARDEL <i>orcinus orca</i>				
	LARDEL				
	LARDEL	0	0	0	0
	Blackfish <i>Globicephala macrorhynchus</i>				
Blackfish <i>pseudo crassidens</i>					
Blackfish					
Blackfish	0	0	0	0	
U DEL					
	<b>TOTAL DELSPP</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
PHYMAC	<i>Physeter macrocephalus</i>				
BALSPP	<i>Megaptera novaeangliae</i>				
	<i>Balaenoptera physalus</i>				
	<i>Balaenoptera</i>				
U BALSPP					
	<b>TOTAL BALSPP</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
KOGSPP	<i>Kogia sima</i>				
	<i>Kogia breviceps</i>				
U KOGIA					
	<b>KOGSPP</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
UTW	Unidentified toothed whale				
UC	unidentified cetacean				
ZISPP	Ziphus				
	<b>TOTAL DURING THE SURVEY</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

Total Shutdown due to SoC detection	0
Total Delay due SoC detection	0
Total detection airguns ON	0
Total detection airguns OFF	0
TOTAL detection SoC	0

		NUMBERS OF			
SEA TURTLES		DELAY	SHUTDOWN	NO ACTION	NONE REQUIRED
TURTLE	TURTLE_Cc <i>Caretta caretta</i>				
	TURTLE_Cm <i>Chelonia mydas</i>				
	TURTLE_D <i>Dermochelys coriacea</i>				
	TURTLE_E <i>Eretmochelys imbricata</i>				
	TURTLE_Lk <i>Lepidochelys kempii</i>				
	TURTLE_Lo <i>Lepidochelys olivacea</i>				
	TURTLE_N <i>Natator depressa</i>				
	U TURTLE				
	<b>TOTAL DURING THE SURVEY</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

## 5.6 Annexe 6: FINAL REPORT OF THE MMO AND PAM OPERATOR ACTIVITY (STANDARD PLAN)

### Summary

#### 1. General information

- 1.1. Context and objectives of the mission (taken from the mission preparation document, showing the dates, geographic areas and types of operations)
- 1.2. Observation and mitigation measures implemented (recap of Ifremer's specific measures and their possible adaptation to the campaign in question, exclusion zone, phase details).
- 1.3. Marine mammal populations in the target zone (presentation using provisional elements available, including the status of the species in question).

#### 2. Methodology and organisation

- 2.1. Seismic sources and equipment: configuration of seismic sources: volume, geometry, acoustic characteristics (SEL, SPL), shot rate; list of the other acoustic equipment that has been activated.
- 2.2. Operation planning: table summarising the vessel's daily activity (transit, manoeuvre, shot, etc.).
- 2.3. Visual observation (presentation and organisation): observation posts, observation platform configuration, communication with the ship, equipment, field forms, vessel route, database, identification photo, weekly report
- 2.4. Acoustic detection (presentation and organisation): system used, deployment and justified parameter-setting from the Pamguard configuration file
- 2.5. Surveillance team (list of MMOs, PAM operators, including their names, affiliations, training and specialist areas)

#### 3. Results

- 3.1. Operations: explain possible modifications to the source configuration, the position plane, etc.
- 3.2. Marine fauna observed during the campaign: observation work, diagram representing the details of the observation work per vessel activity and per phase, table showing the status of the observation work per phase in number of hours, balance report of operations, observation weather conditions, summary of the main observations of the species concerned and their distribution, summary of the main observations of marine fauna, summary of human activity likely to make an impact

3.3. Acoustic detection results: observation work performed, diagram representing the details of the observation work per vessel activity and per phase, table showing the status of the observation work per phase in number of hours, balance report of operations, presentation of the main acoustic detections: distribution of detections, hours of detections, duration of detections, water height during detections.

3.4. Balance report on following the seismic protocol: report on the detections and observations inside the exclusion zone and measures taken, cross checking the visual observations and acoustic detections.

4. Discussion, recommendations and conclusions

Content left to the initiative of the observers and operators

5. Annexes

Annexe A. Detailed table of the observation periods (specifying names of the observers depending on the timeslots, plus the seismic and sonar activity)

Annexe B. Detailed list of marine animal observations (for each observation: date, geographic coordinates and time, species spotted, number of animals and composition of the group, detection distance, state of operations of the air guns, consequences on the air gun activity, possible comments). Can be presented as “event-forms”, see Annexe 4 and 5.

Annexe C. Daily and weekly reports on the observation periods (chronological report on operation progress and observations)

Annexe D. Photos and miscellaneous documents.

5.7 Annexe 7: PAM damage sheet

